Method of Construction

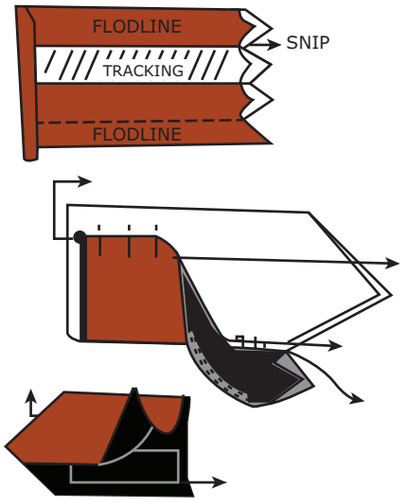


Figure 9.4 Steps in Construction of Stiffened Belt

- Take required length of material with seam allowance
- Cut the stiffening material to the finished width of the belt
- Mark fitting lines on the wrong side of the belt
- Place the stiffening piece to the fitting lines and sew
- Fold the seam allowance along top and bottom edges
- Fold the seam allowance of the square edges and press
- Trim the turnings of the sharp end on the wrong side of the fitting lines for flatness
- Pin and tack this in place, and slip-hem the bend into position
- Machine stitch in flat rows on the right side of the belt
- Fix a buckle to the square end if required.

9.2.1.3 Shaped Belt

The belts are shaped to create variety and beauty. Belt shapes are designed to match various garment styles and the wearer.

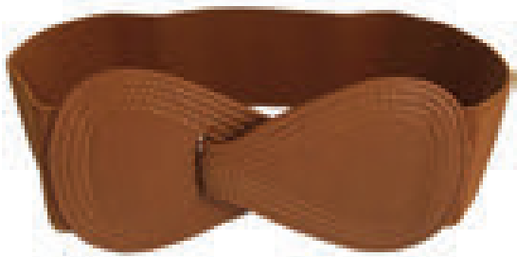


Figure 9.5 Shaped Belt

Method of Construction

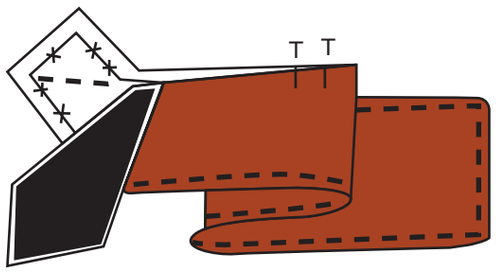


Figure 9.6 Construction of Shaped Belt

- To make shaped belt, first cut the interfacing of pre-shrunk canvas
- Use suitable weight of interfacing for stiffening the belt
- Pin the interface to the outer belt fabric
- Pin, rotate and baste the fabric edges over the interfacing
- Clip the curved edges if the belt is shaped
- Fold edges of the lining to the belt and stitch
- The belt may be edge stitched from the right side if needed

9.2.1.4 Interfaced Belt

The interfaced belt is the softest belt used for comfort. Folding over and becoming rope-like when worn are the disadvantages of this style of belt. From the fashion point of view, it is not the most desirable belt as many prefer stiff belts. One must be careful while selecting washable belts.

XII TDD_English version CHAPTER 09.indd 129 1/13/2020 3:25:47 PM