

Figure 9.7 Interfaced Belt

Method of Construction

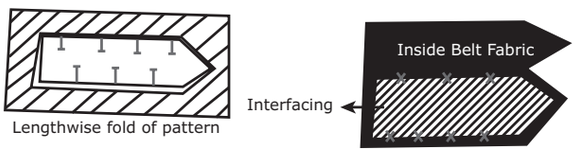


Figure 9.8 Steps in the Construction of Interfaced Belt

- Fold the belt pattern in half-lengthwise
- Cut the interfacing fabric exactly to the finished width of the belt
- Pin the interfacing to the wrong side of the belt
- Cut the belt edges evenly
- Catch stitch the long edge of interfacing to the center line of the belt
- Then fold the belt, half- lengthwise with right sides together and stitch along the edges of the belt to the pointed end.
- Cut off the corners and turn the belts right side out
- Turn the seam allowances and baste the finished edges
- Top stitch near the long edges if needed.
- Attach buckles and finish.

9.2.1.5 Belt with Backing

Belt with backing is a type of belt that gives a professional belt. This belt is constructed with backing material. This type of belt does not fold since it is backed with supportive backing material. Pre-shrinking has to be done if soft and ribbon like materials are used.



Figure 9.9 Belt with Backing

Method of Construction



Figure 9.10 Steps in Construction of Belt with Backing

- Cut a piece of backing material to the necessary length with an overlap of about 7 inches.
- Carefully shape one end of the belting as desired.
- Cut matching fabric in lengthwise grain for one inch wider and 1" longer than the belting
- Lap one edge of the belt fabric 1/2 inch over the belting and baste in place firmly.
- Hold the belt in a curved position
- Cover the fabric around the belting and keep it tight
- Pin it in place over the belting and sew the remaining edge in place

XII TDD_English version CHAPTER 09.indd 130 1/13/2020 3:25:47 PM