- Machine stitch ¼ inch away from the outer edges of the belt with longer stitches
- This belt is also made broader as waistbands and is suitable for many skirts.

9.2.1.6 Contour Belt

The contour belt is shaped to the body. It will hold the waistline perfectly and rest at the back. It is usually wider at the back and narrower at the front. The wider belts prominently show the contours or curved lines of the body. Narrow belts do not highlight the contours. This belt takes more time to make than the straight belt with belting as a backing.



Figure 9.11 Contour Belt

Method of Construction

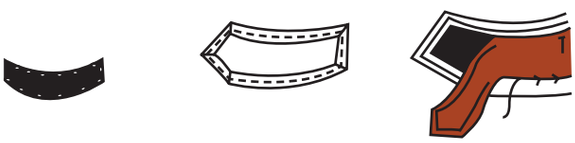


Figure 9.12 Steps in Construction of Contour Belt

- It is constructed by cutting an interfacing, facing and the stiff, in a cross grain to hold the belt correctly in position.
- Take the required length of belt material and fold into two
- Mark the on fold line as centre back
- From centre back to centre front mark side seam line point
- Mark a point between centre back and side seam line
- Also mark a point between centre front and side seam line
- Cut through the marked points and overlap the top side of the belt to properly fit the contour belt to the figure
- The belt is finished in a corresponding way as interfaced belts
- This belt is also made broader as waistbands.

9.2.1.7 Inner Belt Backing

Usually, the inner material is used for extra stiffness. The cross grain ribbon is cut and finished at the inner part of waistband which holds the skirt. The natural shape of the human figure is enriched by this belt.



Figure 9.13 Inner Belt Backing

Method of Construction

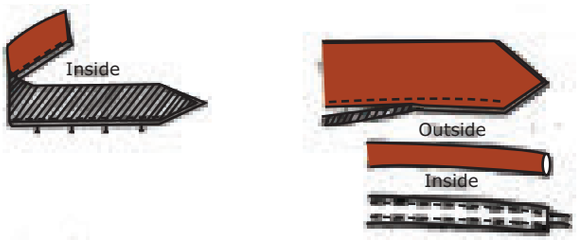


Figure 9.14 Steps in Construction of Inner Belt Backing

- Take required length of material with seam allowance
- Cut the stiffening material to the finished width of the belt
- Place the stiffening material in between belt material

XII TDD_English version CHAPTER 09.indd 131 1/13/2020 3:25:47 PM