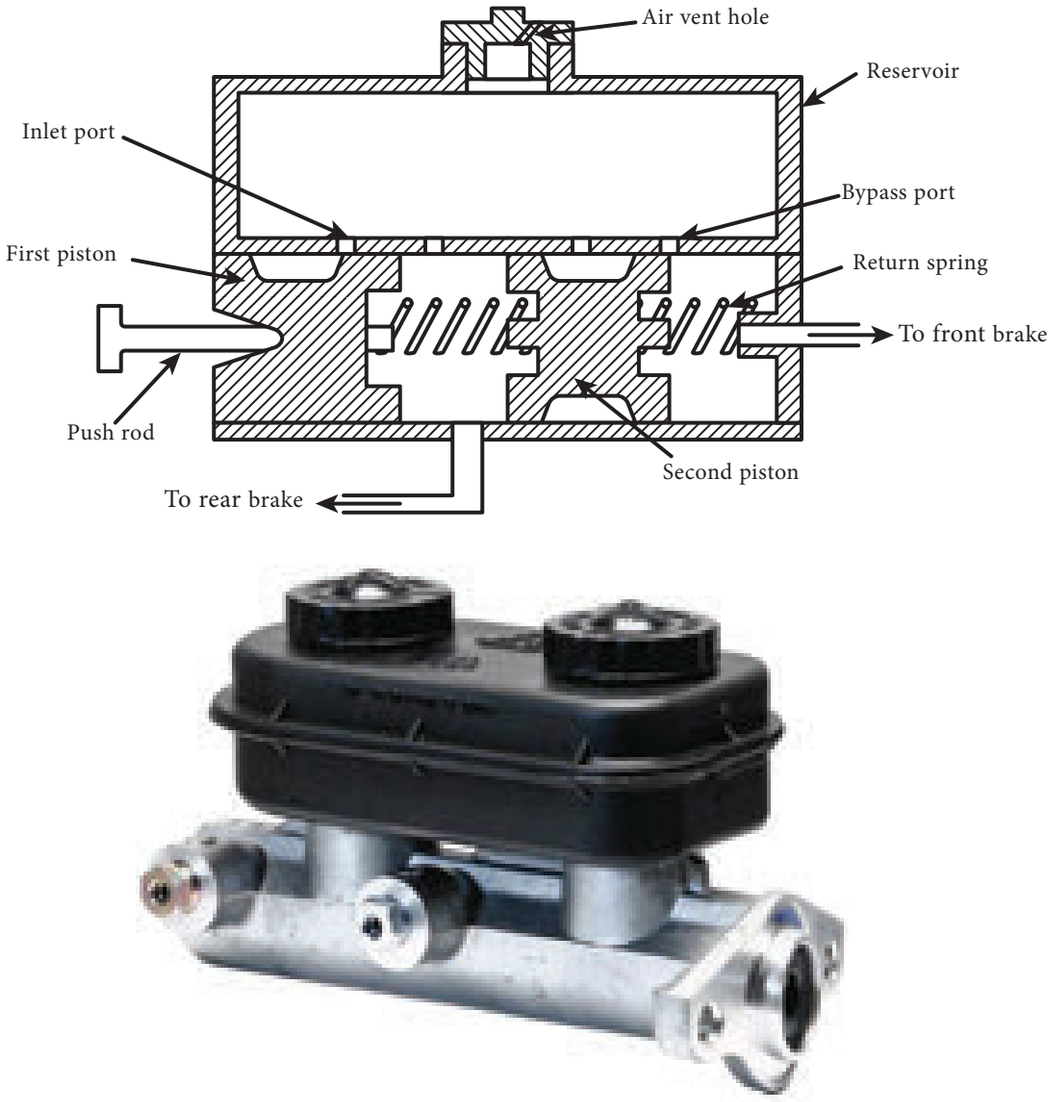


Figure 6.4.1.4 (a) Photographic view of the tandem master cylinder

spring with test valves - all are in two sets, therefore when the driver press the brake pedal, the piston inside the cylinder is moved by means of the push rod and hence the brake fluid is discharged initially to the rear wheels. In addition, while pressing the brake pedal the second piston is also finely moved and through another way the brake fluid is passed to the wheel cylinder of the front wheels and the brakes are activated. When the legs are removed from the brake pedal, the brake fluid pressure is reduced. Hence the brake fluid in the wheel cylinders is pushed backward by means of pistons and comes back to the master cylinders.

Through the pipelines the brake fluid reaches the inlet port and pushes the pistons out there. Hence the both brake shoes are expanded against tensile force caused by the return spring and mate with brake drum which create friction and tend to stop the wheels. Also by releasing brake pedal the fluid pressure is got reduced. Furthermore, by means of return spring the brake shoes are pulled and the pistons get back to its original positions.

BAE_ENG_Chapter_06.indd 100 12/20/2019 1:04:20 PM