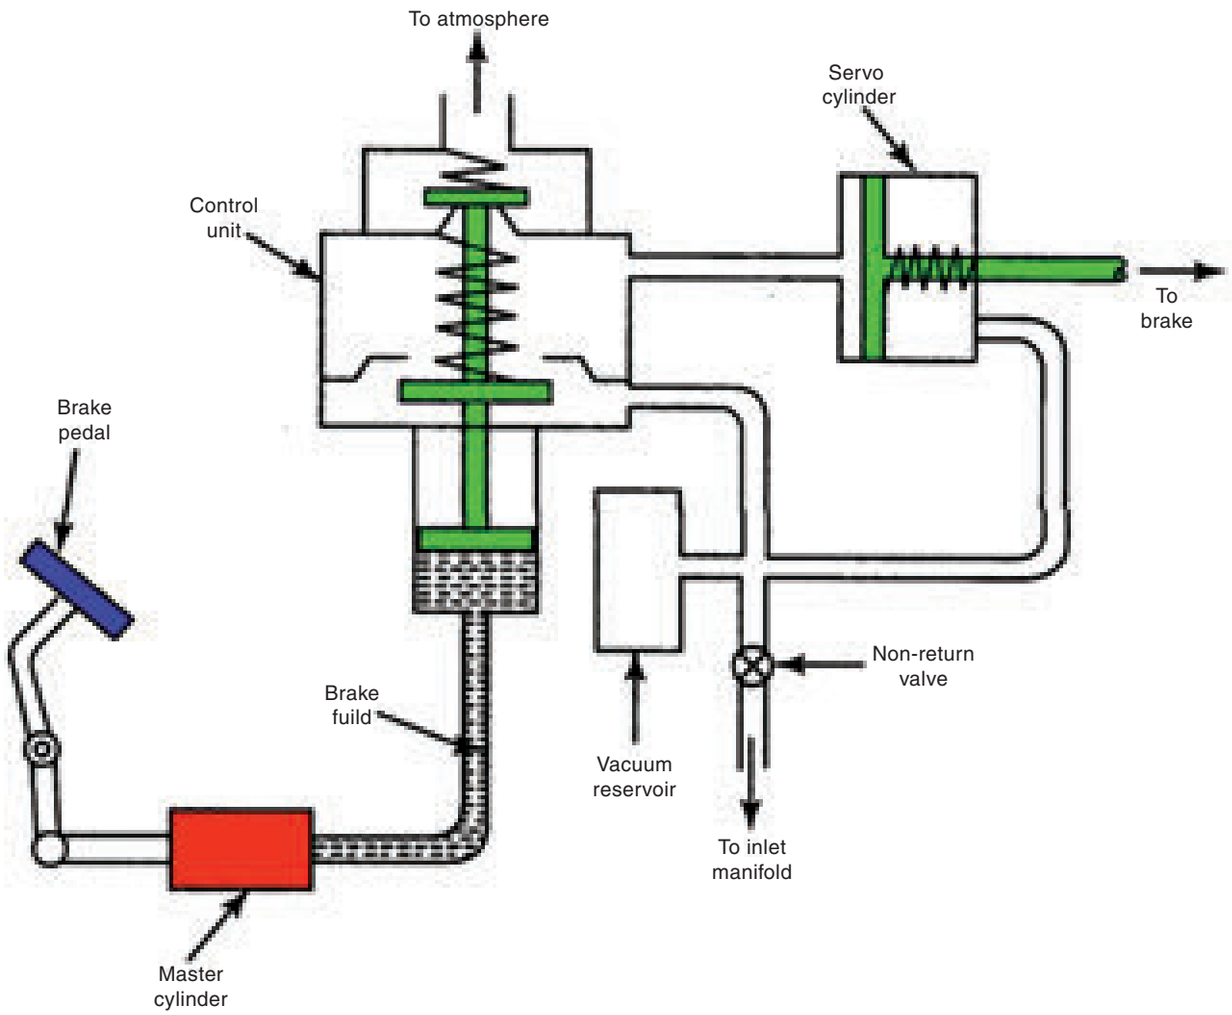


Figure 6.4.3.2 (b) Schematic of the Vacuum assisted servo Brake system

When pressing the brake pedal the pressure developed on the brake fluid inside the master cylinder pushes the piston inside the control unit in upward direction. Hence the valve in the bottom of the control unit gets closed and valve at the top get opened. Therefore right side of the piston inside the servo cylinder contacted with atmospheric air. Hence the vacuum force completely spread over the right side of the piston in the servo cylinder and moves the piston lever in the same direction. This transfer in place of piston actuates the braking system with the path of connections. By this way the braking force got reducing while the driver presses the brake pedal.

6.4.4 Engine exhaust brake

It is used as an assistant brake in heavy vehicles such as TATA .While traveling down continuously, in heavy traffic roads and when travelling for a long distance safely and slowly by applying the brake this type of brake is helpful. This type of brake is more suitable for the vehicles travelling at less than 40 km speed. However, this type of brake system is not applicable for stopping the vehicle

BAE_ENG_Chapter_06.indd 109 12/20/2019 1:04:22 PM