with carrier plate through anchor pins. In between the top edges of the brake shoe, brake cam or wheel cylinder is located.

Both the brake shoes are in the pulling position with help of the retracting spring. Brake liners are fixed on the outer face of the brake shoes by riveting or by using the lining cement. The edge of brake shoe which presses the brake drum first is called as the leading shoe and the edge which presses the brake drum later is called as the trailing shoe. Brake shoes are often made up of cast iron or steel.

6.8.3 Brake linings

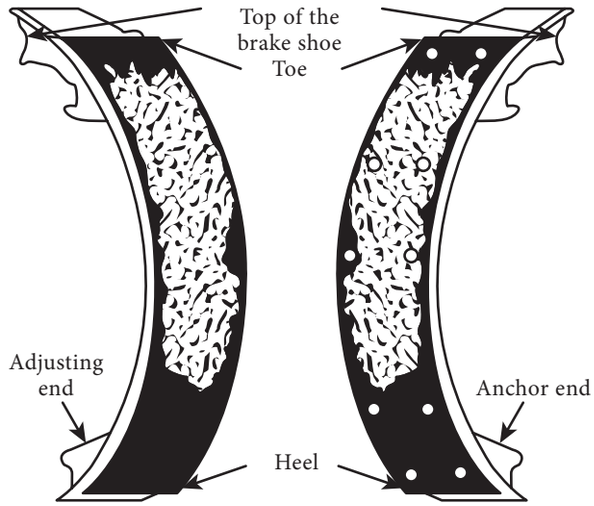


Figure 6.8.3 (a) Brake linings

Brake linings are placed on the outer face of the brake shoes. While pressing the brake pedal the brake linings are only in contact with the brake drum and reduces the speed of wheels. Therefore in brake linings the temperature reaches to about 350°C more and wear occurs. Hence the brake lining should be made to withstand very high temperature and wear resistant and should not change its shape. Brake linings are classified in to two types, they are

1. Solid woven type
2. Molded type.

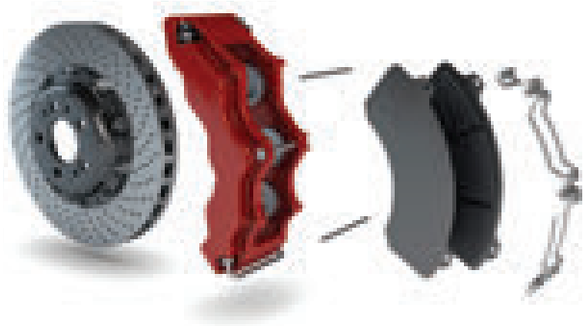


Figure 6.8.3 (b) Brake linings

1. Solid woven type brake liner

It is made up of a non-metallic twisted asbestos thread. The average compression coefficient of this liner is 0.4. This type of liner is easily tolerable 260°C up to 350°C. It is manufactured by asbestos threaded fibers which are combined with brass and zinc rods that could not be easily subjected to wear. These types of brake liners are used in cars and heavy vehicles. These brake liners are attached to the brake shoes using riveting method.

2. Moulded type brake liner

This type of brake liners are made of natural asbestos fibers with resin-like synthetic paste by using moulding technology. The average friction coefficient of this liner is 0.4. This liner could be operated at the temperature between 400°C to 450°C without any wear.

6.9 Brake adjustment

Brake linings and brake joints get worn out due to the continuous usage of

BAE_ENG_Chapter_06.indd 115 12/20/2019 1:04:24 PM