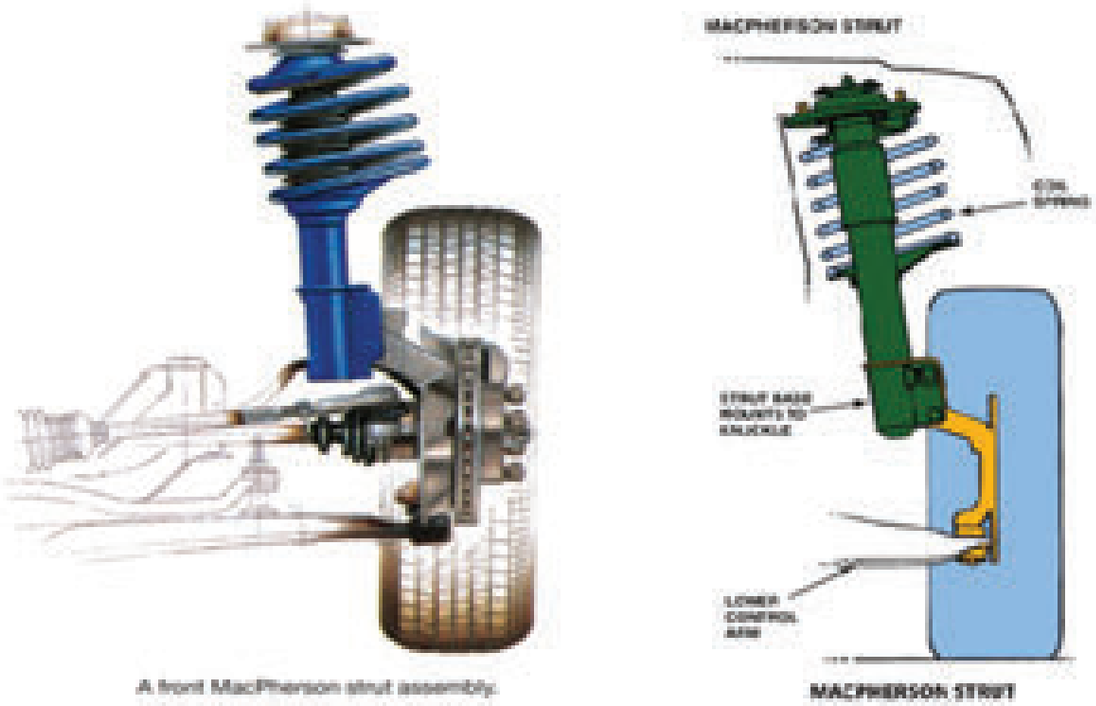
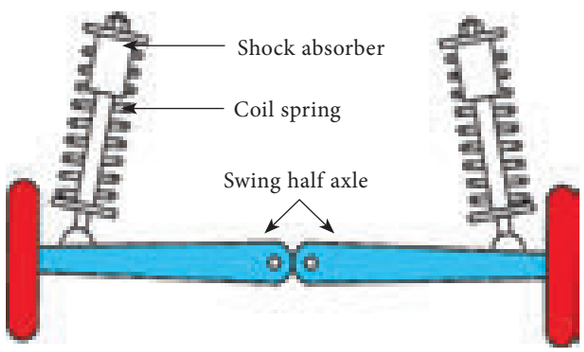


Figure 7.3.2.4 MacPherson Strut types

7.3.2.5 Swing half axle types

The simple construction is shown in the figure 7.3.2.5. Wheels are firmly fixed on one end of the half axle and the other end of the half axle is fixed to the center point of the chassis frame. Coil spring and shock absorber are mounted as shown in the figure. When the wheel passes the bumps and pits, axle get oscillates. As the vehicle moves on the irregular roads, coil spring and shock absorber are stretched or compressed simultaneously to take the road disturbances.



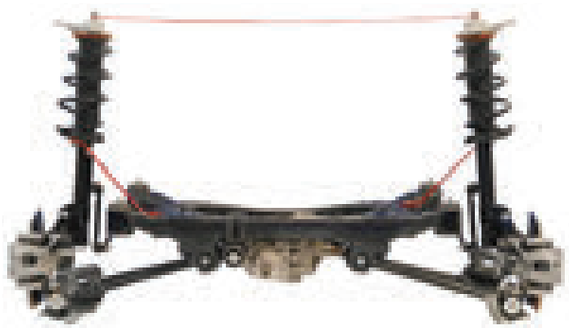


Figure 7.3.2.5 Swing half axle types

7.3.2.6 Rear axle independent suspension system

Rear axle independent suspension system construction is given in the figure 7.3.2.6. In most of the vehicles, the drive from the engine is given to the rear wheels. Hence it is difficult to design, construct and installing an independent suspension system in rear wheel drive vehicles. The differential unit is firmly fixed on the chassis cross frame member. Two

BAE_ENG_Chapter_07.indd 135 12/10/2019 11:54:04 AM