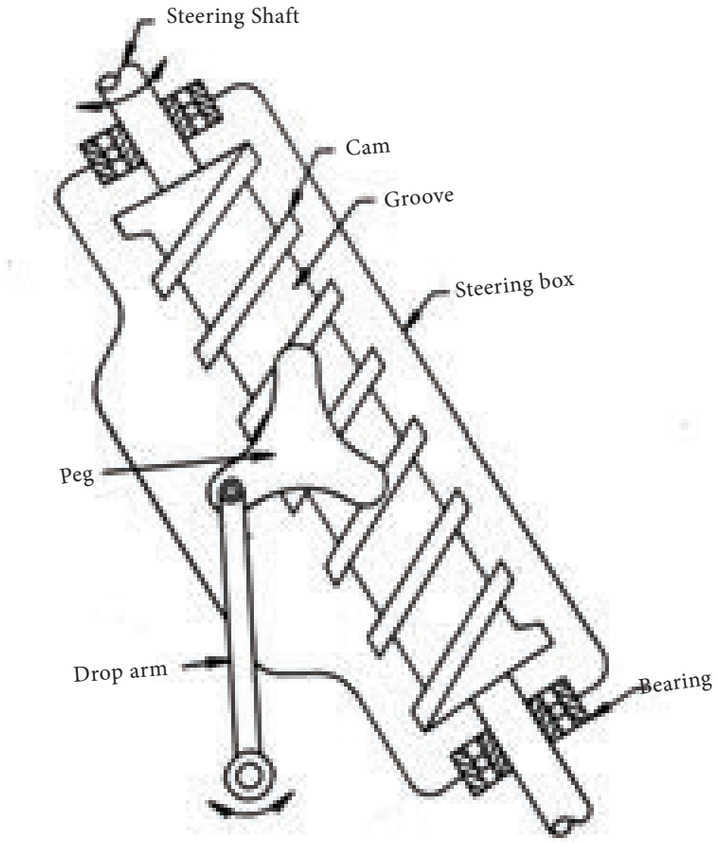


Figure 8.3.1.2 (b) Cam and peg type steering system

on its surface between its bearing and this shaft is known as a cam.

- An integral rocker arm and shaft is placed half-way along the cam. At the free end of the rocker arm a conical peg is fitted which engages the groove.

Working Principle

When the steering wheel and shaft rotate the camshaft, one side of the spiral groove screws the peg axially forward or backward, depending upon the direction of turning of the cam. This forces the rocker arm to pivot about its shaft axis and as a result a similar angular motion is transferred to the drop arm, which is attached to the shaft's outer end. Thus the road wheels are turns either left or right.

8.3.1.3 Worm and Sector Steering Gearbox

Construction

- The worm is firmly connected to the inner column of the steering shaft.
- Worm shaft is mounted on the housings with the help of two taper roller bearing makes the rotation of shaft easily.
- The sector gear is meshed with worm.
- The sector gears form a part of the rocker shaft in the steering gear box.

Working principle

- When the driver turns the steering wheel, the worm will turn and turns the sector gear. The rotary motion of

BAE_ENG_Chapter_08.indd 150 12/10/2019 12:11:17 PM