- Wheel track is the distance between both the front wheels or rear wheels measured from the centres of tyres.

3. Front over hang

Front over hang is the distance between the front bumper and centre of front axle.

4. Rear over hang

Rear over hang is the distance between the rear bumper and centre of rear axle.

5. Over all width

The distance between the two side members is called over all width.

6. Over all height

It is the amount of space between the ground surface to the upper side of the vehicle body is called over all height.

7. Over all length

The distance between the centre of front and rear bumper is called as over all length.

8. Ground Clearance

- Ground clearance is the amount of minimum space between the road surface and the underside of the chassis.

9.4 Body

Body is the superstructure for all vehicles. It may either constructed separately and bolted to the chassis or manufactured integral with the chassis.

- The chassis and body make the complete vehicle.
- A body consists of windows and doors, roof, luggage compartment, passenger seats etc.
- A body should be designed such that it will against the air resistance, gradient resistance and rolling resistance.

9.4.1 Functions of the vehicle body

1. Vehicle body protects the passengers and the goods from sunlight.
2. Prevent the dust from entering into the vehicle.
3. Protects the passenger from rainfall.

9.4.2 Requirements of the vehicle body

1. Weight of the body should be as minimum as possible.
2. It should have minimum number of components.
3. It should have reasonable fatigue life.

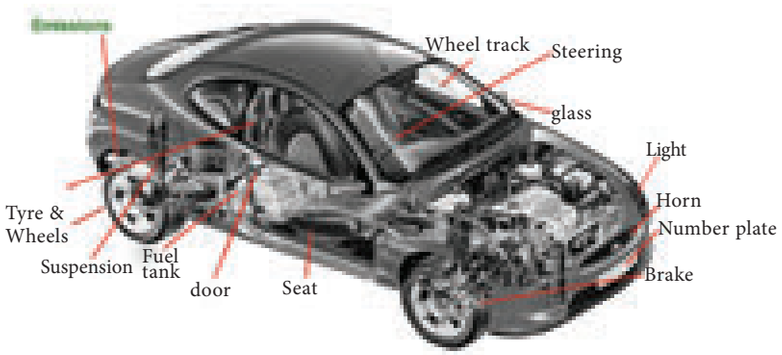


Figure 9.4 Body

BAE_ENG_Chapter_09.indd 175 12/20/2019 1:05:58 PM