
- Used to change gears softly, to stop the vehicle and for Engine idle.

2.2 Principle of the Clutch

Clutch works on the principle of friction. When the rotating disk C connects with disk D, both will start to rotate. This is the basic principle in Clutch.

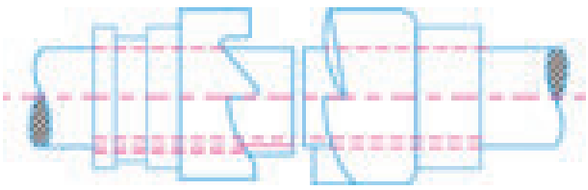

2.3 Qualities of Good Clutch

1. Should have high torque transmission.
2. Should join in step-by-step.
3. Should be a good transfer of heat.
4. Operating balance is required.
5. Should be able to bear the shocks.
6. Should have free pedal play.
7. Should be easy to operate.
8. Should be in simple construction, cheap in cost and high working life.
9. Low space should be adequate.
10. Should have high co-efficient of friction.


2.4 Components of Clutch



1. Clutch Plate
2. Clutch Lining
3. Pressure Plate
4. Coil Spring
5. Release bearing
6. Clutch linkage

2.4.1 Clutch Plate

Clutch plate should be made of steel. Hub is situated in centre of the clutch plate. Hub consists of splines. Clutch plate has moving capacity. Hub is attached with disk. Disk is surrounded by many cushion springs. Above this, friction lining is attached with rivet or glue. Helical spring is attached in centre of the plate to bear torque. This is called as torsional or damper spring.

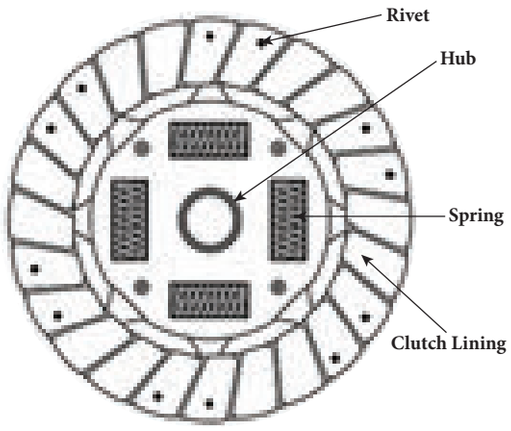

2.4.2 Clutch Lining

The two ends of the clutch lining and clutch plate are attached with the help of rivets or some special glue. The clutch lining is made up of following materials.

1. Asbestos
2. Reybestos
3. Fibre
4. Leather
5. Cork

NM4B1A

BAE_ENG_Chapter_02.indd 16 12/20/2019 1:00:33 PM