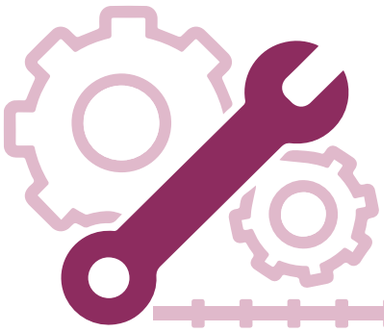

Practical – 5
Master Cylinder

Aim
Dismantling, inspecting and assembling the given master cylinder.

Equuipments
Given master cylinder

Tools required
1. Ring spanner
2. Double end spanner
3. Screw driver
4. Wooden hammer

Material required
1. Cotton waste
2. Diesel
3. Brake oil

Reason for dismantling
1. Braking system not functioning properly.
2. Leakage if brake fluid from master cylinder.
3. Less braking efficiency.

Dismantling
- Remove the oil lines from the master cylinder.
- Disconnect the brake pedal connection from the master cylinder from the chassis.
- Drain out the brake fluid from the master cylinder.
- Remove the circlip by using the circlip plier.
- Remove the piston assembly and spring from the master cylinder by using wooden hammer.

BAE_Practical.indd 239 12/20/2019 2:35:28 PM