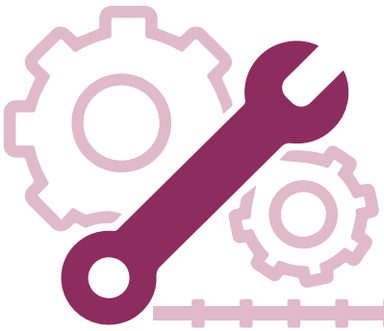

# Practical – 6
## Wheel Cylinder

### Aim
Dismantling, inspecting and assembling the given wheel cylinder.

### Tools Required
1. Long nose plier
2. Double end spanner
3. Ring spanner
4. Screw driver
5. Brake shoe tongues
6. Wooden hammer

### Material required
1. Cotton waste
2. Kerosene
3. Brush

### Reason for dismantling
1. Brake is not applied when brake pedal is pressed
2. Brake is not released even return spring is in good condition
3. Leakage of brake fluid through dust cover
4. Less brake efficiency
5. Wear and tear of rubber cup
6. Difficulties in brake pedal operating
7. Manufacture POI is over



BAE_Practical.indd 243 12/20/2019 2:35:30 PM