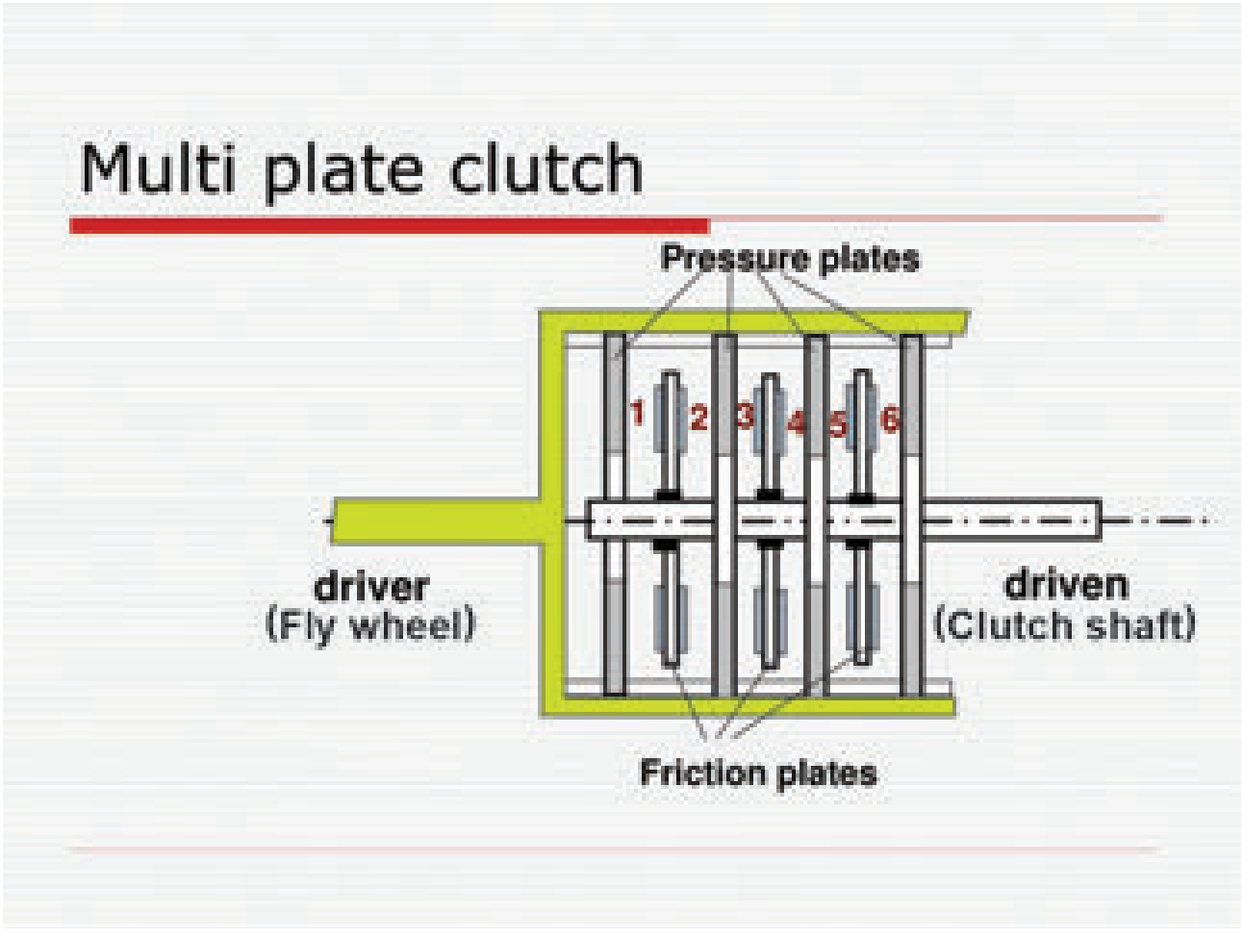


Figure 2.5.2 (b) Multiplate clutch

- So pressure plate is moving backward opposite to coil spring pressure.
- At this stage, a gap will form in between clutch plate and pressure plate.
- So the power from engine is not transmitted to gear box.
- This is called as clutch disengaged.

When clutch pedal released

- Pressure plate is pressed by coil spring force.
- So pressure plate connects the clutch plate with fly wheel.
- Now, engine power is transmitted to gear box.
- This is called as clutch engaged.

Advantages

1. Transmits more torque.
2. Smooth joining
3. Less noise
4. More life.

Disadvantages

1. Not used in heavy vehicles.
2. Difficult in maintenance
3. High initial cost

BAE_ENG_Chapter_02.indd 21 12/20/2019 1:00:34 PM