- So outside end of the diaphragm spring pulls pressure plate in backward direction.
- Now, a gap is formed in between pressure plate and clutch plate.
- Therefore, a engine power is not transmitted to gear box.
- This is called as Clutch disengaged.

When clutch pedal is released

- Outside end of the diaphragm spring pushes the pressure plate.
- So clutch plate joins with fly wheel.
- Therefore, engine power is transmitted to gear box.

Advantages

1. Transmits more torque.
2. Low maintenance is required.
3. Low space is required.
4. More life.
5. Works smoothly with less noise.

2.5.4 Fluid fly wheel

Components

1. Crank shaft
2. Gear box shaft
3. Pump
4. Turbine
5. Vanes
6. Oil seal
7. Oil

Construction

- Pump is attached with fly wheel, which operates by a component called Driving member.
- Turbine is attached with gear box shaft. This is called as Driven member.
- Inside of pump and turbines, vanes are there. Vanes are filled with oil at a particular level.
- Oil seal is attached to stop the oil leakage.

Operating method

At Idle speed

- When engine rotates with this speed, pump attached with crank shaft operates easily.
- Now due to less centrifugal force, oil will not move fast towards turbine.

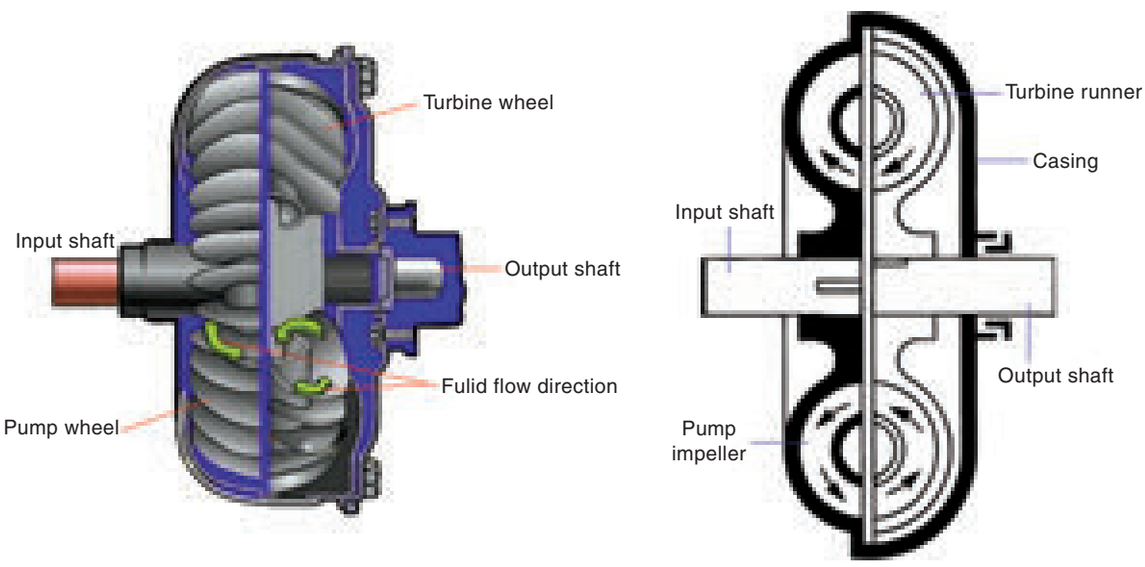


Figure 2.5.4 Fluid fly wheel clutch

BAE_ENG_Chapter_02.indd 23 12/20/2019 1:00:34 PM