4.13.3 Three quarter floating axle

In this type, one bearing is at the differential side and another bearing is placed in between the axle housing and wheel hub. The axle shaft is connected tightly with lock nut and key with the wheel hub. The axle shaft receives both driving torque and end thrust completely and bears one fourth of the vehicle's weight. The remaining weight of the vehicle is carried out by the axle housing. It is mostly used in the ambassador and Jeep like vehicles.

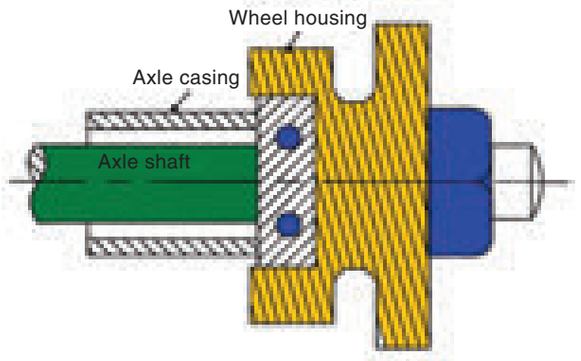


Figure 4.13.3 Three quarter floating axle

DO YOU KNOW?

In 1769 Nicolas-Joseph Cugnot of France arguably invented the first full-scale, self-propelled mechanical vehicle or automobile. It was a steam-powered tricycle.





BAE_ENG_Chapter_04.indd 67 12/10/2019 11:29:25 AM