profile can be built when devices are first delivered to an organization, in a process known as *onboarding*.

> **DEFINITION *Device onboarding*** is the process of deploying a device and registering it with the services and networks it needs to access.

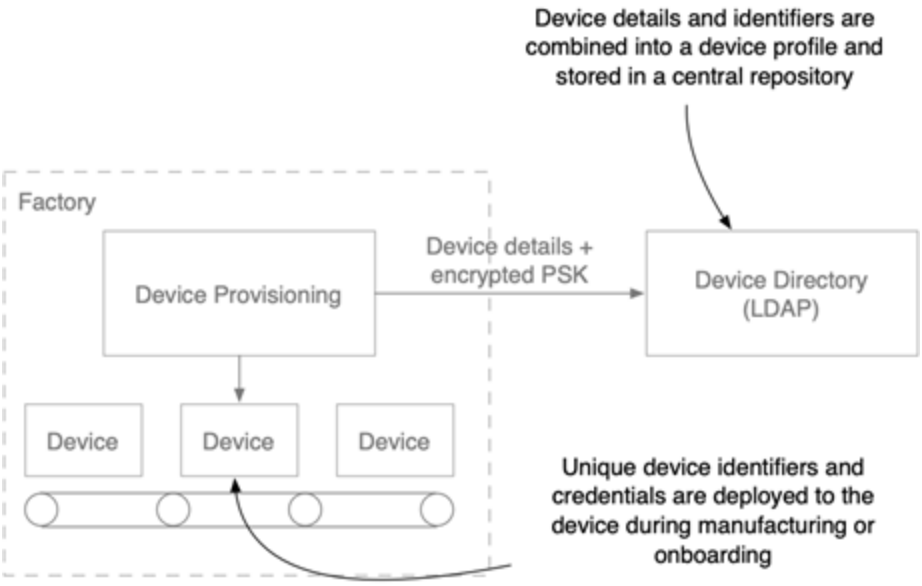


Figure 13.1 Device details and unique identifiers are stored in a shared repository where they can be accessed later.

Listing 13.1 shows code for a simple device profile with an identifier, basic model information, and an encrypted pre-shared key (PSK) that can be used to communicate with the device using the techniques in chapter 12. The PSK will be encrypted using the NaCl `SecretBox` class that you used in chapter 6, so you can add a method to decrypt the PSK with a secret key. Navigate to src/main/java/com/manning/apisecurityinaction and create a