normal input and output capabilities to obtain access tokens from users. In the normal OAuth2 flows discussed in chapter 7, the OAuth2 client would redirect the user to a web page on the authorization server (AS), where they can log in and approve access. This is not possible on many IoT devices because they have no display to show a web browser, and no keyboard, mouse, or touchscreen to let the user enter their details. The device authorization grant, or *device flow* as it is often called, solves this problem by letting the user complete the authorization on a second device, such as a laptop or mobile phone. Figure 13.7 shows the overall flow, which is described in more detail in the rest of this section.

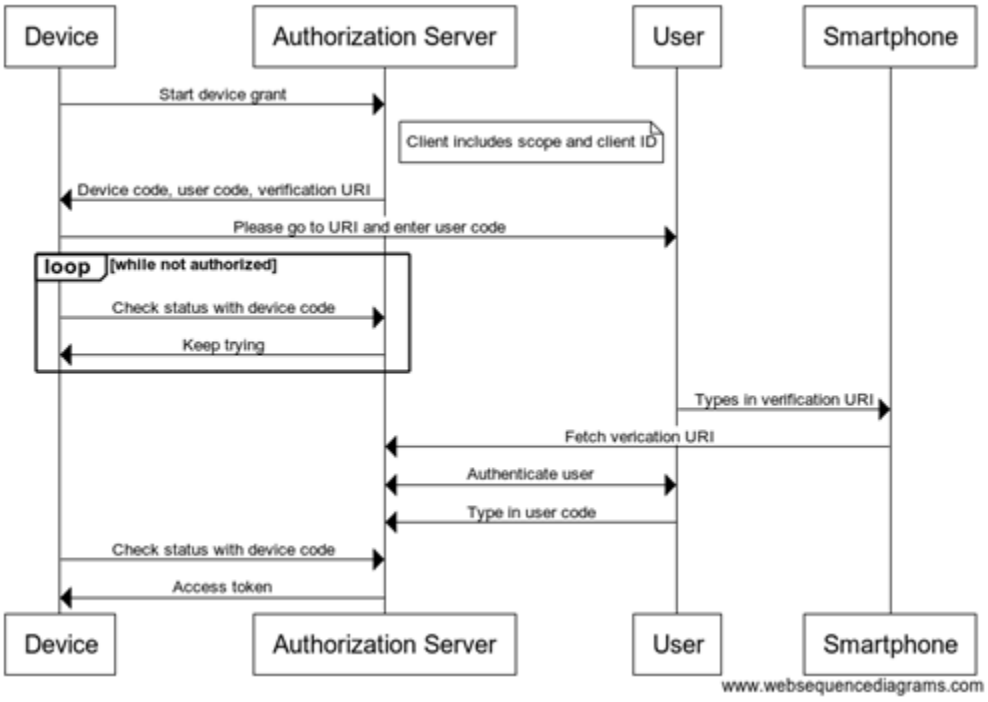


Figure 13.7 In the OAuth2 device authorization grant, the device first calls an endpoint on the AS to start the flow and receives a device code and short user code. The device asks the user to navigate to the AS