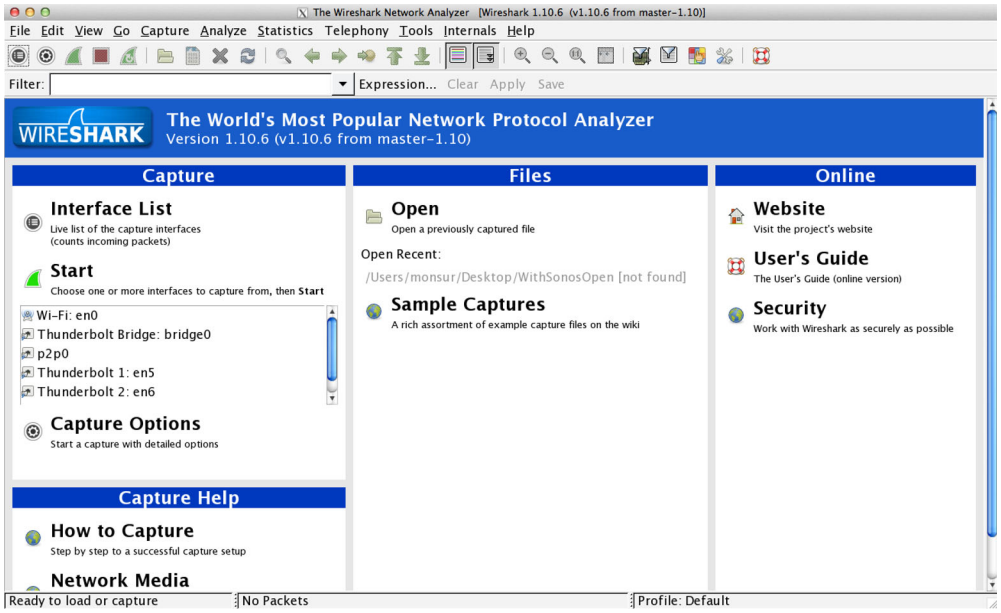


Figure 7.7 Wireshark startup screen

> **TIP** It might be a good idea to close all open tabs and any other sources of network traffic while Wireshark is running. This will make it easier to find your CORS requests among all the other network chatter.

This screen offers a lot of choices, but we're going to focus on starting a network capture. To initiate a network capture, choose your network interface and click Start. The network interface is the interface through which network requests are made. Choosing the right network interface can be tricky. If you're making requests to the outside world, you should choose the interface you're connected with, such as Wi-Fi. But if you're following along with the sample code, you should select the "loopback" interface, because the sample is making a request from your computer to your computer.

> **NOTE** Windows users may have issues with this step. If you're on Windows, you can skip ahead to the next section, which covers Fiddler, a packet analyzer for Windows.

Once the network capture has started, Wireshark switches to the view in figure 7.8. Wireshark is now monitoring and logging all the network traffic passing through your computer. Each line in the log is a network request or response. Don't worry about making sense of this output at the moment; you'll learn how to filter the data to find what you're looking for.

Now that the network capture has started, you need to trigger a CORS request so that it can be logged. You can do this by reloading the page at http://localhost:1111/client.html.