




Shooting away

Google's Pixel line of phones over the years have gained a reputation for being one of the best camera phones available in the market. And getting to them during the teardown can be a tedious process. To get to the cameras, after you have removed the battery cable, you need to remove the mmWave antenna, held in place by a bracket which is attached to the phone's body using a Torx T3 screw, and a cable which surfaces after the bracket has been removed. Once you have removed the mmWave antenna assembly, you'll again need to remove the thermal paste. But this time, it is from the mmWave antenna. After that, unfasten the two Torx T3 screws that hold the camera assembly in place. You will see a spring on the top left corner of the camera assembly, which you can remove using tweezers. Use a spudger to disconnect the front camera cable, after which you can use the same tool to undo the cables holding the rest of the camera system in place. Once all the cables have been undone, you can just lift the camera assembly off the chassis of the phone.

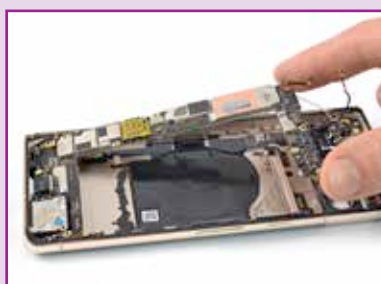

The mother of all boards

The last thing that remains to be removed after you have pulled out the cameras, screen, and battery out of the phone is the motherboard. To free the motherboard, after removing the cameras, you'll need to remove the speaker assembly. First, unfasten the screw holding the earpiece speaker in place and after heating the back of the phone for a bit, use the spudger and pull out the speaker. Then, you'll be able to remove the front camera as well. Disconnect the antenna cable (white, black, and NFC) from the mainboard using the tweezers. The next cable in your way would be the antenna-microphone interconnect cable. There's one additional black antenna cable on the right that you'll also need to remove. Now, the only thing that you have to remove before pulling out the motherboard is the sim tray. Once that is out of the way, you can unfasten the three Torx T3 screws holding the motherboard. Next, pry the motherboard away from the chassis and lift it away!

Images courtesy:



Website: [iFixit.com](https://www.ifixit.com)