


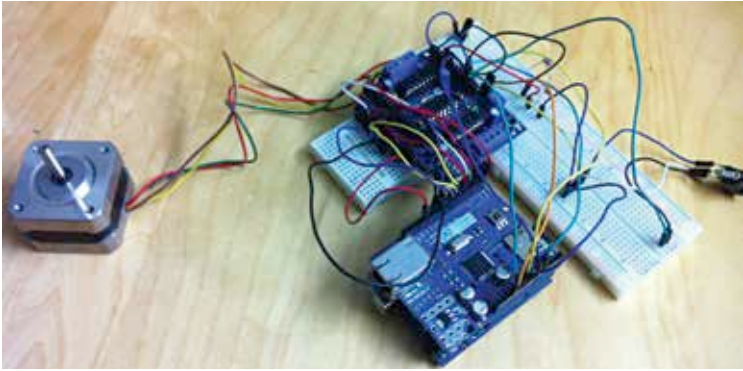

Hardware for blind control using Arduino

perature and a photocell to detect intensity of external light to open or close the blinds. The settings for the same can be set via a web based user interface.

Components needed:

- Arduino
- Arduino Ethernet shield
- Arduino motor shield
- Temperature sensor - TMP36
- Photocell - to detect intensity of light
- Breadboard
- 12 V Stepper Motor
- 100-ohm resistor
- MicroSD card

Connect the motor shield and Ethernet shield to the Arduino, by stacking them on top of each other. The motor shield is used to control a stepper motor which opens or closes the blinds. The Ethernet shield is used to provide the web user interface.

You can find detailed instructions for automating your curtain / blind check the link at <http://www.instructables.com/id/Arduino-controlled-automated-blinds-with-Web-UI/?ALLSTEPS>

Lighting control via Bluetooth and App

A good home automation DIY that can be very useful is control of lighting using a smartphone app. The app also supports voice commands.