

of your devices to the settings of the wireless router. Only your authorised devices will be able to connect to your Wi-Fi.

The MAC addresses are considered to be hardcoded into the networking tool. Hence one Address will permit only one device on that particular network. Here there is a fact you have to understand that it is possible to spoof the MAC address. Now you don't need to panic, because the hacker or attacker must initially know your computer's MAC address which is connected to the Wi-Fi.


To enable the MAC address filtering, you have to create a complete list of your devices which you want to connect with your Wi-Fi. Then you have to find its MAC address and then add it to the MAC address filtering in the administrative settings of the router. By opening the command prompt, you are able to find your MAC address for your PC, and then you have to type `ipconfig /all`. This will mainly show the MAC address next to the physical address name. Under the network settings, you are able to explore the MAC address of all your hardware devices easily. Sometimes it may vary; hence you must go for an in-depth search.

- **Procedure 5: Reducing the wireless signal range:**

This is the best procedure, which everyone must follow to secure your wireless network effectively. In general, your high signal range is one of the major reasons which many users are accessing your internet connection. It will also simplify the work of the hacker to connect with your Wi-Fi. To get rid of this issue, you must reduce your wireless signal range. Using the different wireless channels or changing the router mode to 802.11g instead of 802.11b or 802.11n should do the trick.

- **Procedure 6: Upgrade the router's firmware:**

Occasionally you have to check the site of the manufacturer to ensure that your router is running the upgraded firmware. Here, you are able to check

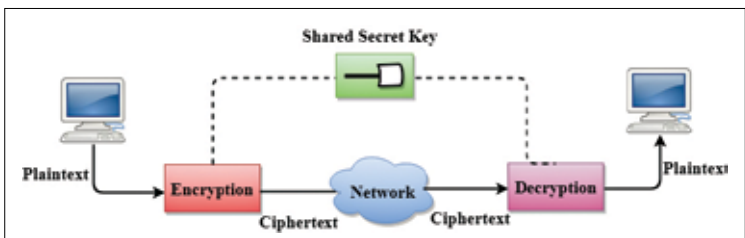

Source: <https://static.javatpoint.com/tutorial/computer-network/images/computer-network-privacy-2.png>