


among the very first tasks that you carry out. To set up a Network Interface Card, you first need to determine whether the Network Interface Card you are using or intend to use is compatible with FreeBSD. In case it is, you need to find out which FreeBSD driver needs to be installed to make the Network Interface Card work on your system. If you have a common Network Interface Card, several drivers are already included in GENERIC, which means your card will be probed when the system boots.

After the driver for your Network Interface Card has been loaded, it needs to be configured. This can be done using the `ifconfig` command. The main indicators of when a card loading are:

- The keyword `UP`, meaning that the card has been loaded and is ready for use.
- The presence of an internet address, or `inet`.
- The presence of a subnet mask or `netmask`.
- The presence of a broadcast address.
- The verification of the card's MAC address.
- The mode of physical media selection has been indicated.
- The link status is set as active.

After you have set up your Network Interface Card, make it a point to test it once or twice. This can be done through rebooting. If the system reboots

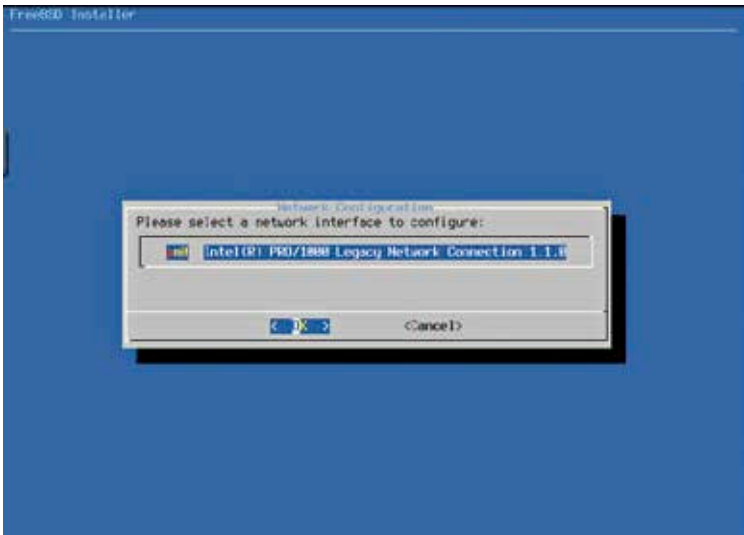

Network Interface Card in FreeBSD