





A typical CMOS sensor
This one belongs to a
Canon EOS 1D Mark 4

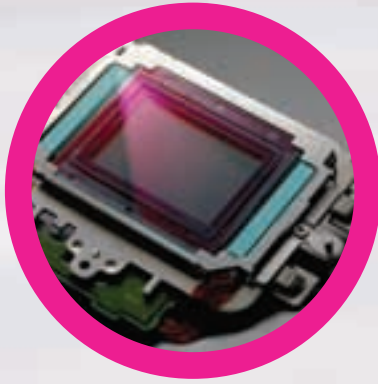

The photodiodes in these photosites convert this light stored as a charge, and the way they are read depends on the type of sensor – CCD or CMOS. A CCD sensor reads the charge collectively and each pixels electrical value. In a CMOS sensor, each pixel is read individually at the site, by additional transistors present in the region. This electrical charge is converted into an analogue voltage that is sent to an ADC (analogue to digital converter) where it is converted into a number that represents location and brightness values for each pixel and is readable by all digital devices (pic 5).



Final image JPEG of the Statue of Liberty as can be viewed on your PC's image viewing software.



Ching's Secret

Instant, Hakka & Pad Thai Noodles,
Soups, Sauces & Miracle Masala

Ching's Khao, Baki Bhool Jao



@ChingsSecret



www.facebook.com/ChingsSecret



www.youtube.com/ChingsSecret