


command, get to a command prompt and type in the following:

“tracert 192.168.0.2”

This will start listing the number of hops between the computer and network devices. When a device fails, you know it's that device that is causing the problem.

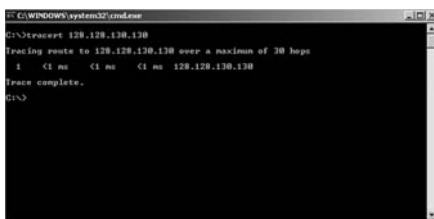

```
C:\WINDOWS\system32\cmd.exe
C:\>tracert 128.128.130.130

Tracing route to 128.128.130.130 over a maximum of 30 hops
  0  <1 ms  <1 ms  <1 ms  128.128.130.130
Trace complete.
C:\>
```

Tracing the number of hops

Note: Hops are the number of intermediates (such as routers) through which data passes from the source (your computer) to the destination (the traced computer) or vice-versa.

Missing Protocols

In Windows 95 and 98, to check if TCP/IP is installed on your computer, go to Network in the Control Panel. If the protocol is installed, it should be listed under the installed Local Area Network properties. If not, you need to reinstall it by clicking the Add button. Select “Microsoft” as the manufacturer, and under the network protocol, select the TCP/IP protocol. You’ll need to reboot the system.

If you’re using Windows ME/2000/XP, go to Control Panel > Network and Dial-up connections > Local Area Connection. Here, go to Properties. If the protocol is installed, it should be listed under the network adaptor properties. It is important to note here that a network adaptor is different from a dial-up adaptor. The dial-up adaptor gives you access to the Internet, and not to the LAN. If you don’t see the TCP/IP protocol here, click the Add or Install button, select the protocol and click OK. Once installed, you will need to reboot your system for the changes to take effect.

Version Problems

Sometimes, problems crop up when using certain programs, and you see a pop-up with an error message. This may be due to differences