



Winamp's DSP plugin configuration


Select “NullSoft SHOUTcast Source DSP v1.90” (or whatever is the latest version) and click “configure active plugin”.



The SHOUTcast Source Window Output Tab




XXXX



XXXX

Enter the SHOUTcast server IP address in Address field, the server port number and password in their respective fields. If you're going to use your own PC to broadcast your collection, accept the defaults. Accept the default values for Encoder (1), Reconnection Timeout value (30 seconds) and check the “Automatic Reconnection on Failure” box. Next, click on the

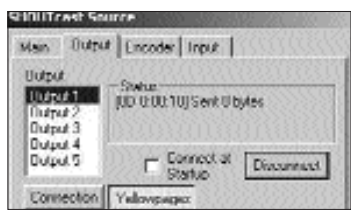

XXXX