



tition towards the left, while the 1.5 V slot has a partition towards the right. Each of these slots also had a Pro version that extended the slot a bit to the right. The AGP Pro slot was for those cards that needed additional power (which was supplied by the Pro extension). The cards were also similarly-notched. Maximum data transfer speeds offered were: AGP 1X: 266 Megabytes per second; AGP 2X: 533 Megabytes per second; AGP 4X: 1066 Megabytes per second; AGP 8X: 2133 Megabytes/second.

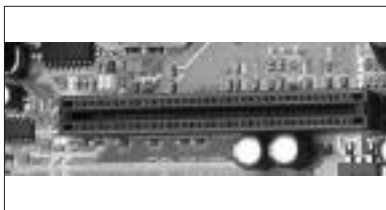


Screenshot 3: Universal AGP slot.jpeg

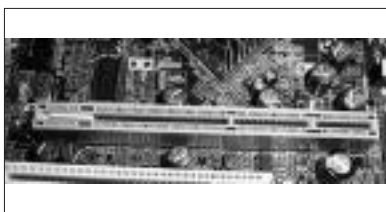

Screenshot 4: AGP pro slot.jpeg

1.1.3 BIOS / CMOS

Though often interchangeably used, the two terms refer to different things. BIOS (Basic Input Output System) refers to a set of instructions that are critical for the functioning of the system. These instructions include information about the components connected

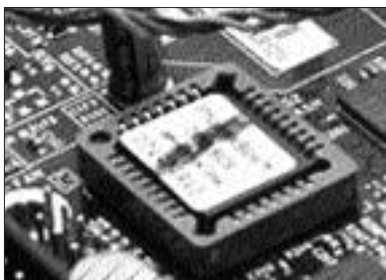

Screenshot 5: cmos chip.jpeg

to the motherboard, like the hard disk, RAM, and the configuration of the many onboard subsystems. CMOS (Complementary Metal Oxide Semiconductor) refers to the chip on which the BIOS instructions are stored. CMOS is the name of the technology behind the chip that stores the BIOS. Present-day CMOS is technically called EEPROM for Electronically Erasable Programmable Read-only Memory. These can be rewritten to, and this allows the BIOS instructions of a motherboard to be updated when required.