


picture on a bright day. The following aperture values, coupled with these shutter speed settings would give you the same exposure.

- $f/2.8, 1/4000$
- $f/4, 1/2000$
- $f/5.6, 1/1000$
- $f/8, 1/500$
- $f/11, 1/250$
- $f/16, 1/125$
- $f/22, 1/60$

As the same amount of light would strike the image sensor, all the above settings would give you an equivalent exposure.

Shutter Lag

Pick up your old (non-digital) camera and click and you'll notice that there's a bit of a break between the instant that you press the button and the opening of the shutter for the particular exposure. The reason for this shutter lag is mechanical. With digital cameras, there's a delay too, but this time it's more of a *processor lag*. The reason is that the camera needs time to set up the circuits and do the calculation for image capture. Sensors need to take measurements, distances need to be calculated and light, colour and whiteness must be balanced. All this, and it just takes a second and a half! And then, it takes the image data and even remembers it for you.

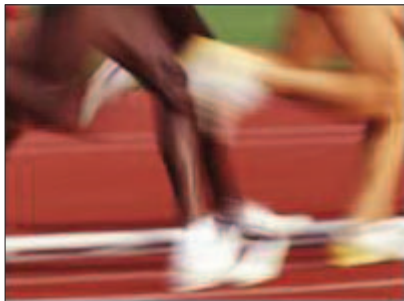

Lag ruined this one

The best method to deal with shutter lag problems in auto-focus shots is to: (a) point the viewfinder directly on to your subject; (b) push the shutter release down – but only halfway – because this permits the camera to focus even before you take your photo; (c) keep the shutter release button halfway down till you feel it's the right moment to catch the image