


work in more or less the same way. Access points broadcast a beacon announcing their presence every 100 milliseconds, and the diagnostic software logs the information from this beacon. This includes the signal strength measured in dB, and the Received Signal Strength Indication (RSSI). More than the quality, the signal strength measurement is an indication of physical distance to the router.

CHOOSE A CHANNEL WITH INSSIDER

One of the most convenient software to use is inSSIDer. You really do not need to understand the inner details of how the Wi-Fi technologies work, as this software quickly surfaces all the most relevant information, and the decisions that you need to take. Just install the software, go through the sign in process, and fire up inSSIDer, and it will give you a list of action points to take. First, it will identify the clearest channel available at that location, which is the one recommended to use. Next, it will inform you of how secure the network is. If you are using an older security protocol, such as WPA instead of WPA2, inSSIDer will prompt you to improve the implementation. Now there is an unhealthy practice by some routers to cheat and use wider channels than what is in the specification. The routers may use 40MHz channels in the 2.4GHz band. This is just horrible for everyone in the area because of the increased exposure to cross channel interference. There are

only 100MHz of spectrum available to start with, so within that limited space the wider channels cause even more cramping. It might be tempting to hog more of the spectrum to get a better experience, but this is not really true, and it is better to use the recommended

software are available on the DVD. Net surveyor lets you record the information in real time, generate reports, and even playback the logged data at a later time. All of the panels show realtime information in running graphs. The channel time course shows the signal strength over a period of time. The AP differential shows differences in signal strength, and if it increased or reduced over time. The usage panel just shows how many access points are using which channel, and their relative strengths. This is the panel that will indicate to you if there are two many

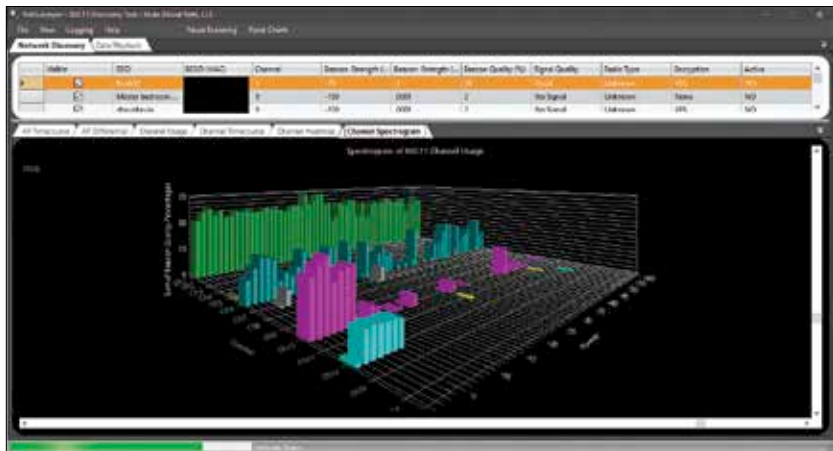

Netsurveyor channel spectrogram, showing unusual activity in channels 10 and 12.

channel width. The wireless medium is a shared resource, and being considerate towards others is the approach that is in the best interests of everyone.

DIAGNOSTICS WITH NETSURVEYOR

When it comes to Wi-Fi diagnostic software, the most widely used and well known one is called NetStumbler. We like to use a similar software called NetSurveyor, which has additional features for power users, and many ways of visualising the data. Both the

APs crowding around a channel. It is surprising during these scans how many smartphone access points, parked taxis, smart home devices, and APs of people moving past are all picked up. The most problematic APs here are those that use non standard channel widths, and cause all sorts of ridiculous situations such as here, where 10 and 12 show activity but 11 is clear. Here, because of cross channel interference from both 10 and 12, 11 is not a great choice although that particular channel is the clearest from the standard ones.



ASUS Mini PC PN62

EASY MODIFICATION,
MAXIMUM POSSIBILITIES

Sales enquiries: jaiswal_abhishek@asus.com
For feedback, email- reachus@asus.com or info_india@asus.com

www.asus.in | Toll Free No. 1800-2090-365



PN62

