

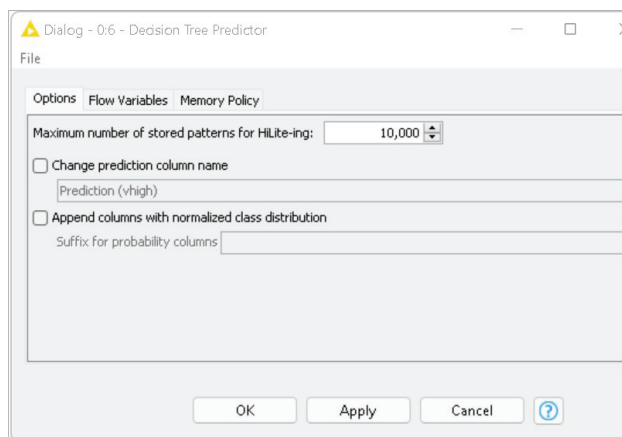
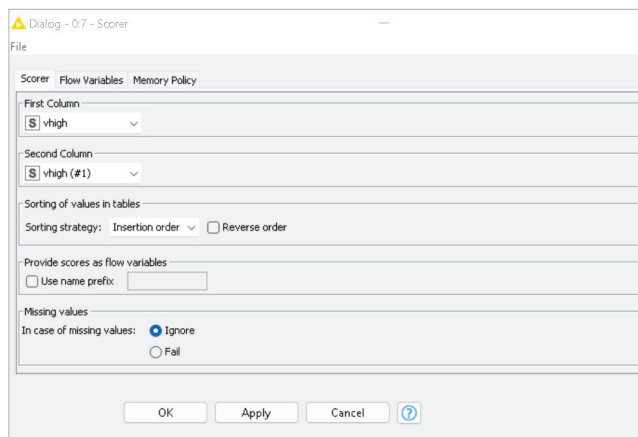
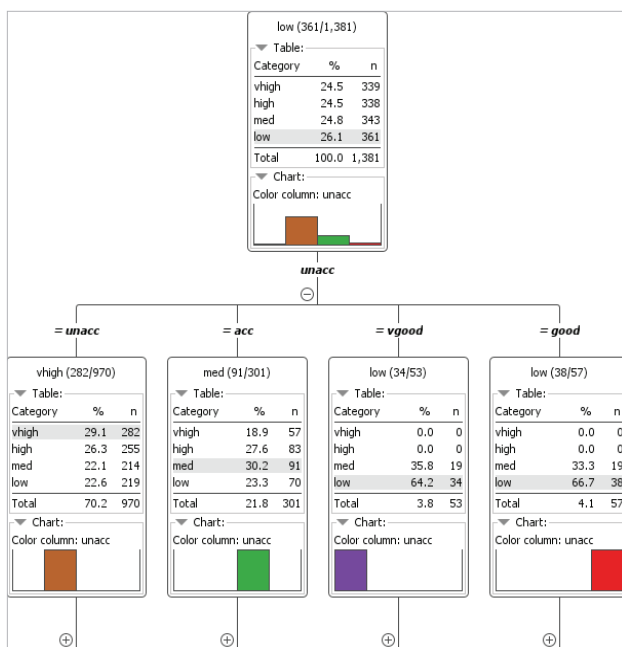

Figure 6: Configuration of *decision tree predictor* node

Figure 7: Configuration of *scorer* node


Figure 8: Decision tree output of the car evaluation model

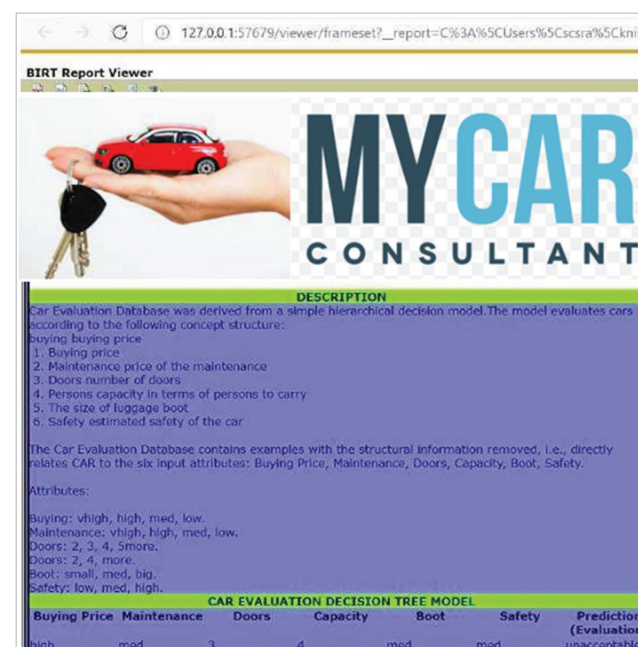


Figure 9: Visualisation report of car evaluation model

how many rows of which attribute and their classification match (Figure 7). Additionally, it is possible to highlight cells of this matrix to determine the underlying rows. Here, the accuracy achieved is 95.6 per cent.

Visualisation output

Figure 8 demonstrates the decision tree output of the car evaluation model, which visualises the learned decision tree. Based on the selections, the tree can be expanded and collapsed with the plus/minus signs.

As with the splitting criteria, the attribute name of the parent node is split, and its numeric value and nominal set value are represented to this child. The value in round brackets states (x of y), where x is the quantity of the majority class and y is the total count of examples in this model.

Figure 9 represents the visualisation report of the car evaluation model. The PMML node is used to transmit models between nodes. PMML ensembles models, through reader and writer nodes, for importing and exporting these with other software. **END** 🐼

By: Dr Maheswari R.

The author is an associate professor in the Vellore Institute of Technology, Tamil Nadu. She has served as a resource person for hundreds of national and international workshops and conferences in the field of IoT.