

```
[root@server1 ~]# for x in $(seq 1 3); do LANG=C LC_ALL=C /usr/bin/mrtg /etc/mrtg/mrtg.cfg --lock-file /var/lock/mrtg/mrtg.l --confcache-file /var/lib/mrtg/mrtg.ok; done
[root@server1 ~]#
[root@server1 ~]#
[root@server1 ~]# indexmaker /etc/mrtg/mrtg.cfg > /var/www/mrtg/index.html
[root@server1 ~]#
```

Figure 8: Terminal output mrtg configuration commands

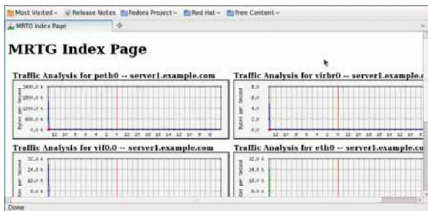


Figure 9: MRTG index page

Other options: finished, list

Configuring: rocommunity

Description:

a SNMPv1/SNMPv2c read-only access

community name

arguments: community [default[hostname] network[bits]] [oid]

The community name to add read-only access for: networknats

Enter 0.0.0.0/0 to specify that all networks are allowed to use this community. Though you can also specify your own specific IP range, as per your configurations. When prompted for the OID, just press ENTER and then type Finished. And then in the end, type Quit.

Select section: finished

I can create the following types of configuration files for you.

Select the file type you wish to create: (you can create more than one as you run this program)

- 1: snmpd.conf
- 2: snmptrapd.conf
- 3: snmp.conf

Other options: quit

We had just finished configuring SNMP on our system. Now our job is to point MRTG to this community and display the graphical network statistics.

We have already installed the MRTG and Apache. So what's left is to configure MRTG to use the 'networknats' community.

Step 1 Edit `/etc/httpd/conf/mrtg.conf` to allow access from our network.

Allow .example.com

Step 2 Create a configuration file to monitor network traffic on SNMP agents:

```
cfgmaker -ifref=name -global \
'workdir:/var/www/mrtg' networknats@/
server1.example.com > /etc/mrtg/mrtg.cfg
```

Step 3 Update MRTG to run after every four minutes by editing `/etc/cron.d/mrtg` as follows:

```
*/4 * * * * root LANG=C LC_ALL=C /usr/bin/
mrtg /etc/mrtg/mrtg.cfg --lock-file /var/lock/
mrtg/mrtg.l --confcache-file /var/lib/mrtg/
mrtg.ok
```

Step 4 Before closing the above

file just copy everything after "root" (that is, starting with LANG=C) using the mouse. We will be using `crontab` to populate our RRD file.

Step 5 Now execute the command given below:

```
for x in $(seq 1 3); do \
LANG=C LC_ALL=C /usr/bin/mrtg /etc/mrtg/
mrtg.cfg --lock-file \
/var/lock/mrtg/mrtg.l --confcache-file \
/var/lib/mrtg/mrtg.ok \
done
```

If you get any errors, don't worry and just repeat the same command again.

Step 6 Now run `indexmaker` to create the `/var/www/mrtg/index.html` file:

```
indexmaker /etc/mrtg/mrtg.cfg > /var/www/mrtg/
index.html
```

Figure 8 shows the output of both the above commands.

Congrats, you have just configured SNMP and MRTG successfully. Time to restart your `snmp` and `http` services. Now open the browser and view the MRTG output, by pointing your browser to `http://server1.example.com/mrtg`. You should see something similar to Figure 9.

Well, that's it for this session. Next time, we'll look at how to tune the HDD I/O using elevators. We'll also learn about the queuing theory and how to configure a performance RAID. 

By: Alok Srivastava

The author is the founder of Network NUTS and holds MCSP, MCSE, MCDBA, MCT, CCNA, CCNP, RHCE and RHCSS certifications. Under his leadership, Network NUTS has been a winner of the "Best Red Hat Training Partner in North India" for the last three years in a row. He has also been a trainer for the Indian Air Force, NIC, LIC, IFFCO, Wartsila India Ltd, the government of Rajasthan, Bajaj Allianz, etc. You can reach him at alok@networknats.dot.net.