


▶ STAINED-GLASS APPLIQUÉ


Stained glass appliqué gets its name from the bias strips that separate the elements in the design, which resemble leading in church windows. You can make bias strips yourself (see pp.46–47) or purchase bias strips

with fusible bonding web on the back, which can be ironed in place to secure the strip while you stitch it in place. If your design features straight lines, you can use strips cut on the straight grain.

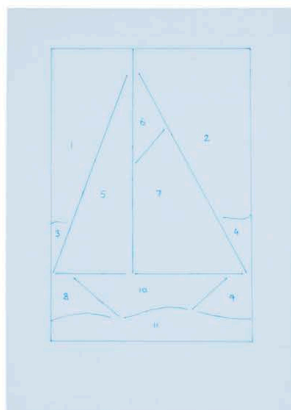

1 Transfer the pattern onto the background fabric. If the design is complicated, number the shapes on the background.

2 Following the manufacturer's instructions, place the rough, non-paper side of the bonding web on the wrong side of the fabric and press in place.

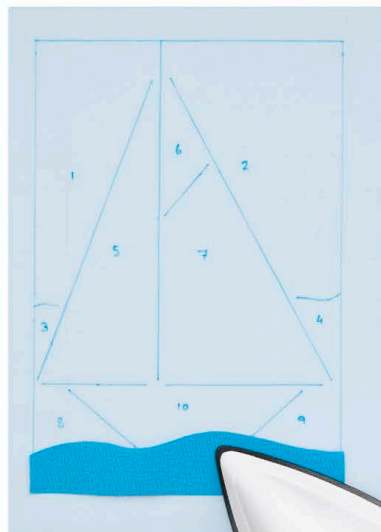

3 Cut out the appliqué shapes without adding any seam allowances. Iron them in place on the background.

4 Butt each piece up tightly against its neighbour, so that it will be easier to catch the raw edges under the bias strips.



5 Plan the order in which you apply the bias strips so that you can cover any raw ends with another strip. Iron on the strips and stitch them in place, using a machine blindstitch.



6 The bias strips cover the raw edges of the pieces over which they are placed. Continue until all of the raw edges are covered.