


REVERSE APPLIQUÉ BY MACHINE




1 With your paper or freezer paper template in place on the top fabric, trace around the outside edge with a water-soluble pen. (We have used a pencil so that readers can see the lines easily.) Place the marked fabric on top of the bottom fabric, both right side up.

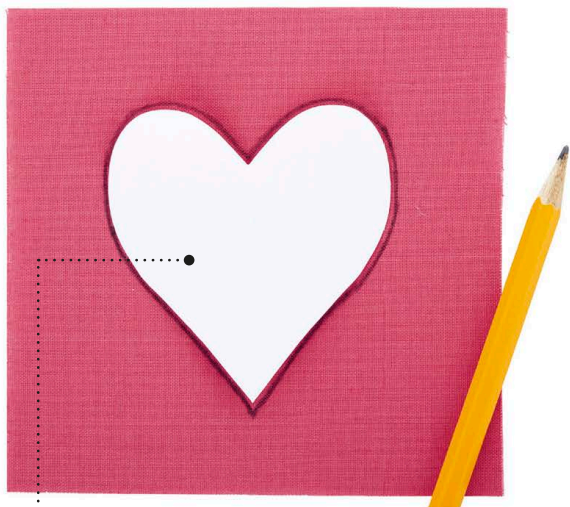

2 Using a needle and thread, tack around the traced shape approximately 1 cm ($\frac{3}{8}$ in) from the edge to hold both layers in place. Pin before tacking, if needed.



3 Using the traced line as a cutting guide, carefully cut through the top layer of fabric only revealing the fabric below.

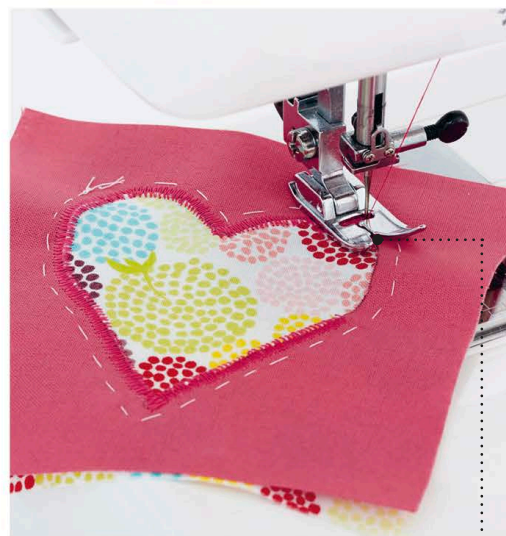

4 Using your sewing machine with a tight zigzag stitch or satin stitch, encase the raw edges of the top fabric with the bottom fabric. Carefully remove the tacking stitches.