





9 Check that the hem is straight, then sew along the edge of the second fold to secure the hem. Repeat Steps 8 and 9 on the other piece of fabric to make the second back piece.



10 Lay the cushion front, right side up. Place one of the back pieces on top, right side down, aligning its long, unhemmed edge with the top raw edge of the cushion front. Place the second back piece right side down on top of the first, aligning its long, unhemmed edge with the bottom raw edge of the cushion front. The two cushion back pieces should overlap. Pin along all four edges.

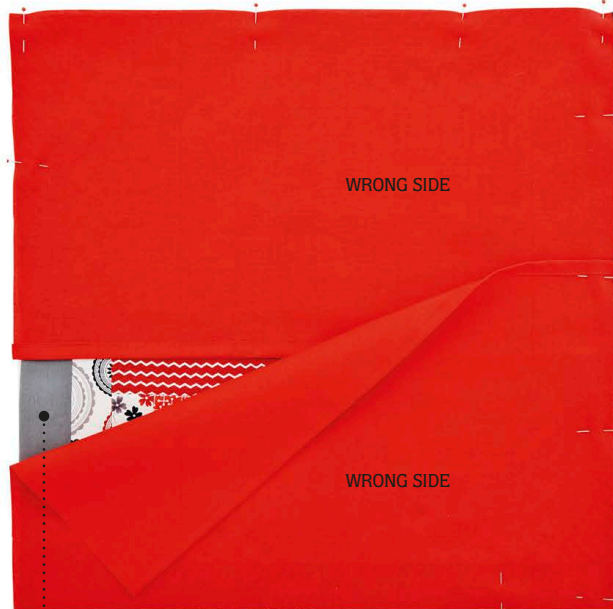

11 Leaving a 1cm ($\frac{3}{8}$ in) seam allowance, sew around all four edges of the cushion cover to secure the back pieces to the cushion front. Remove the pins as you work.

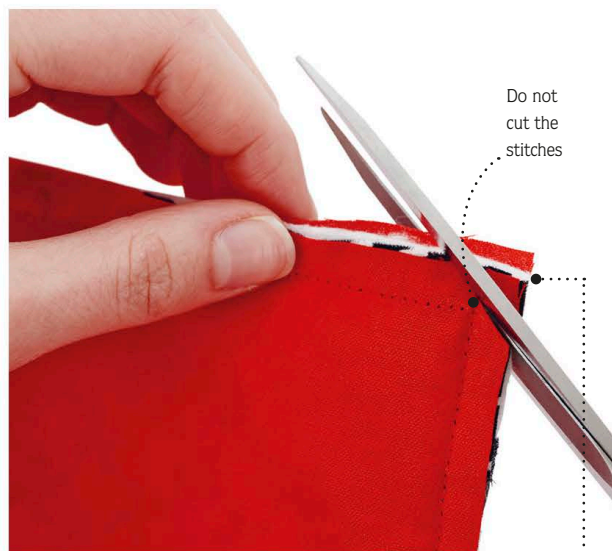

12 Snip off all four corners, taking care not to cut through the stitches. Turn the cushion cover to the right side through the opening in the back. Iron and insert the cushion pad.