






19 Sew around the three pinned raw edges using a 6mm (¼in) seam allowance. Remove the pins as you sew.

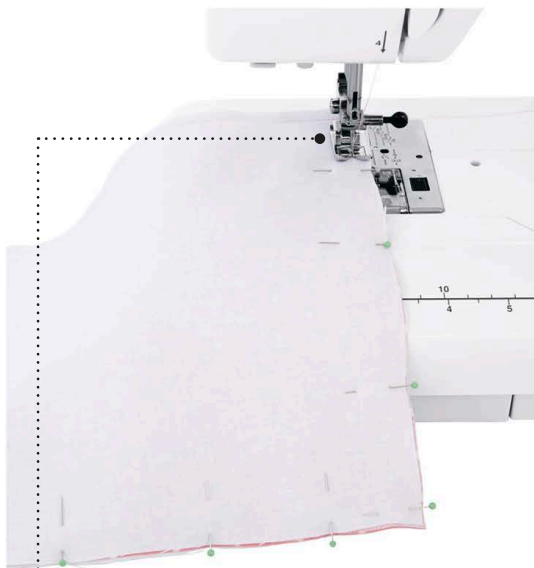

20 Press the seam open. Take the two bottom corners of the bag and pinch them in as shown, so that the bottom seam of the bag aligns with the corresponding side seam on the bag. This will create the boxed corners. Pin either side of the matched seam.

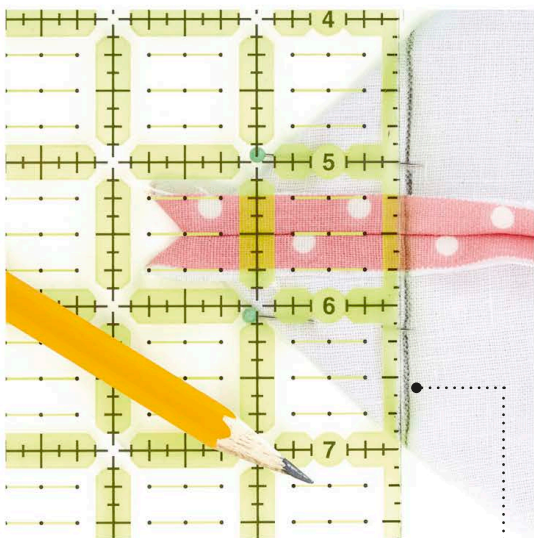

21 Mark a line 3.8cm (1½in) from each corner of the bag, perpendicular to the seams.

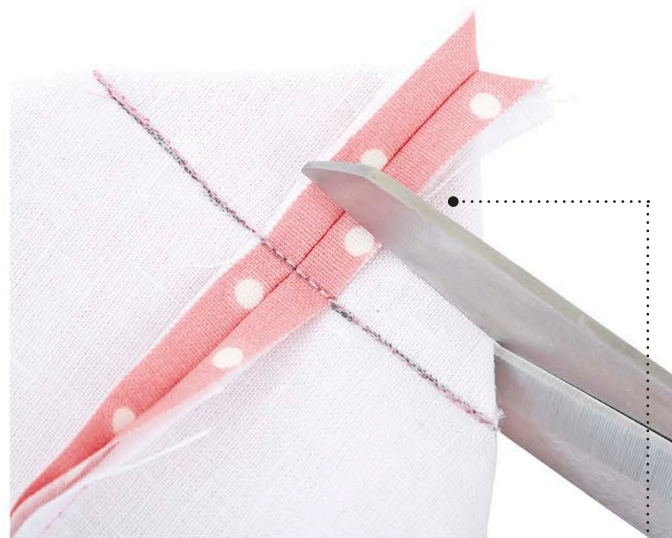

22 Sew along the marked lines, then trim the corner off leaving a 6mm (¼in) seam allowance. Zigzag stitch back and forth over the raw edges to prevent them from fraying and to extend the life of your bag. Carefully turn the bag right side out and press all the seams flat. Thread a matching ribbon through the eye of the zip pull to add an extra touch to the bag.