



## CUTTING HALF-SQUARE TRIANGLES

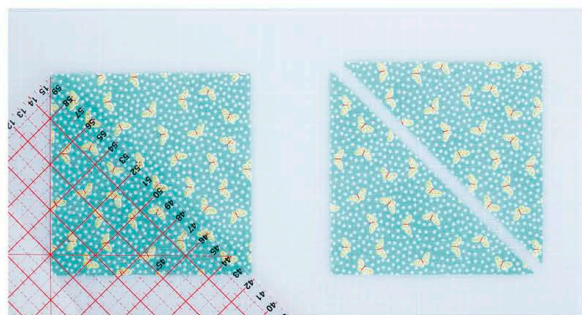


**Cut half-square triangles** across the diagonal of a square. Remember to cut the square large enough so that it includes a seam allowance.

## CUTTING QUARTER-SQUARE TRIANGLES

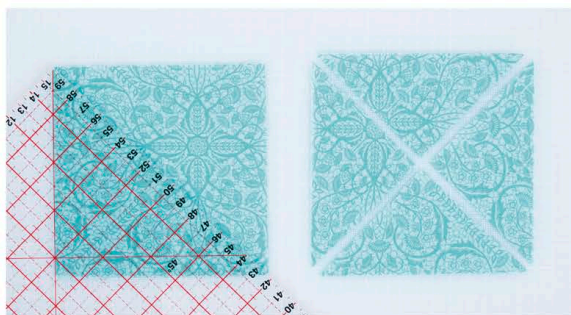


**Cut a square diagonally** from both corners to create four quarter-square triangles. Again, include a seam allowance when cutting the square.

## CUTTING IRREGULAR TRIANGLES

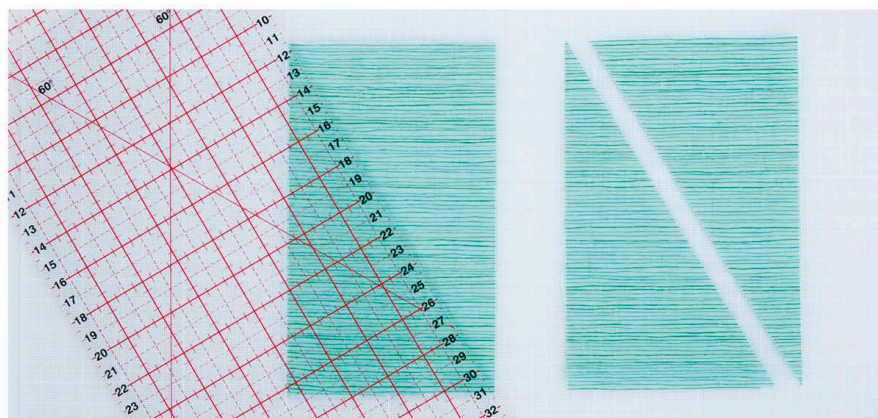


**Cut a rectangle** across the diagonal to create two irregular long triangles. To make a matching pair of irregular triangles, cut another rectangle across the diagonal, starting at the opposite corner.

## CUTTING 45-DEGREE DIAMONDS/TRIANGLES

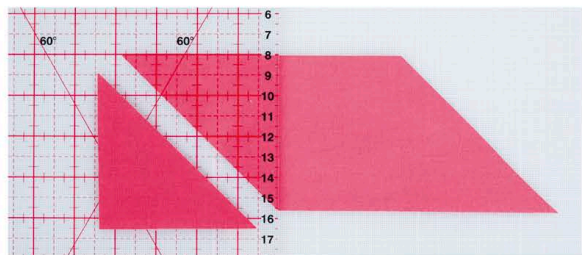

**Cut a strip the desired width** of the diamond, plus the seam allowances. Cut a 45-degree angle at one end. For the second cut, align the quilter's ruler along the cut edge according to the width of diamond required.

## CUTTING CURVES

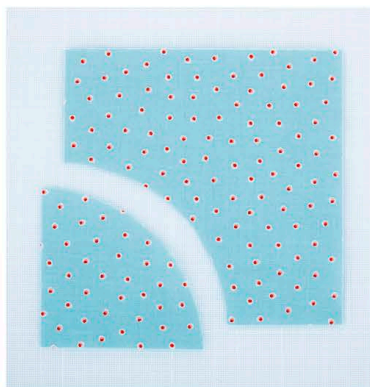

**Gentle curves** can be cut with a rotary cutter, but it is advisable to use a small blade. Blades are available in standard 25, 45, and 90mm (1, 1¾, and 3½in) sizes.