



PRESSING A PIECED BLOCK

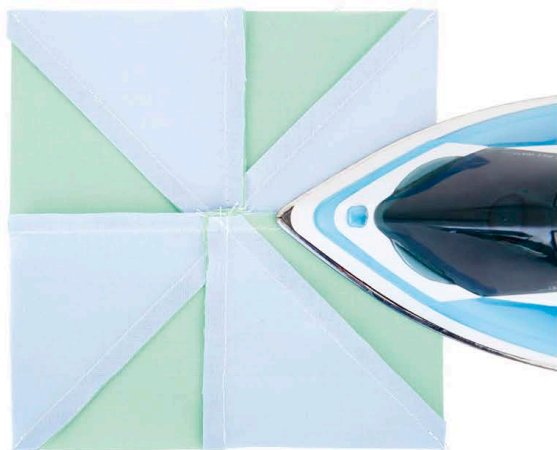


Place the block wrong side up on the ironing board. Do not press hard, but make sure the seams lie as flat as possible.

PRESSING SEAMS OPEN

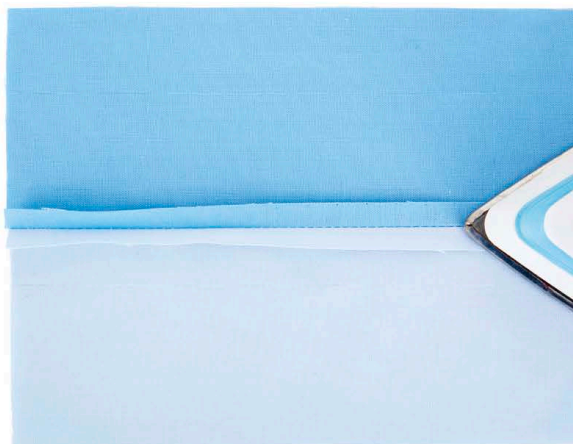

Where several seams meet, you may need to press seams open to reduce bulk. After setting the seam as in Step 1 of Pressing straight seams (opposite), turn the piece to the wrong side, open the seam, and press along the length with the tip of the iron.

THUMBNAIL

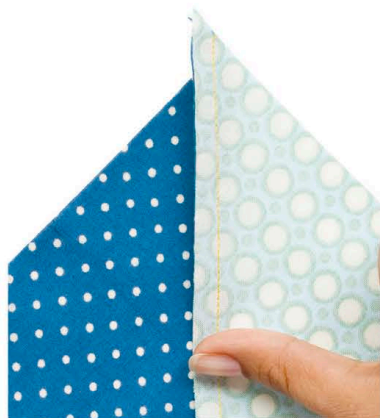

Work on a hard surface. Open the unit out and press first on the wrong side, then on the right side, running your thumbnail gently but firmly along the seamline and pressing the lighter fabric towards the darker fabric.

SMALL WOODEN IRON



Working on the wrong side, place the flat, chisel-shaped edge of the tool on the seamline and run it gently along the seam.

HERA



A hera is a plastic, blade-like device. It is used in certain embroidery techniques but is also useful for creasing a temporary line on the fabric.