




5 Repeat Steps 2–4 for the other corners and other edges, making sure adjacent edges meet in clean mitres at the corners, as shown here. If any trimmed corners from Step 2 are visible, you may need to trim them back some more.

MACHINE
TOPSTITCHED

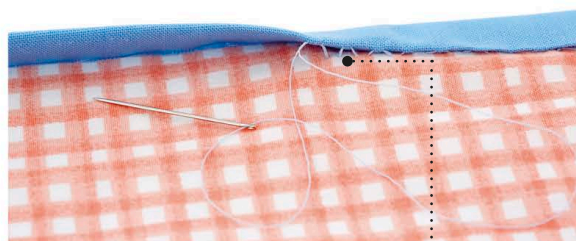

6 Neatly slip stitch (see p.41) the turned-edge binding to the quilt top or, for a much quicker finish, you can machine topstitch along the edge of the binding (see inset).

DOUBLE-FOLD BINDING

Double-fold binding is stronger than bias tape binding (see pp.48–49) and is recommended for binding bed quilts. Quilted wall hangings and other small, layered items that won't get routine wear and tear can be bound with a pre-made bias tape.



1 Cut strips of binding fabric six times the desired width of your finished binding, plus 6mm ($\frac{1}{4}$ in) extra. Cut enough strips to fit around the perimeter of the quilt top, plus approximately 40cm (16in) extra. Join them all together (see p.46). Fold the strip in half lengthways, wrong sides together, and press.

2 Lay the doubled binding strip on the right side of the quilt, raw edges to raw edges. Pin the binding strip in place along the first side, starting about halfway down the side, and checking that none of the joined binding seams land on a corner. If they do, reposition the binding and pin again.



3 Start machine stitching about 20cm (8in) from the start of the binding using the seam allowance of the desired width of the binding. Stitch along the raw edges, mitring the binding when you reach a corner, then pin and continue to sew the next side (see pp.48–49) until all sides have the binding attached. Join the ends in your preferred method.

4 Turn the folded edge of the binding to the back of the quilt, taking care to mitre the corners on the back too. Neatly slip stitch (see p.41) the binding in place.