


## JOINING HAND-PIECED ROWS


When joining rows of hand-pieced units together, you must avoid sewing into the seam allowances, just as you did when hand piecing two units together (see Joining two units with a straight seam, opposite).



**1** Place two rows of hand-pieced units with right sides together. Match the seamlines front and back, and pin through both layers at each corner at the start and end points (see Step 1, opposite). Align the seamlines and pin at intervals to hold the rows in place.

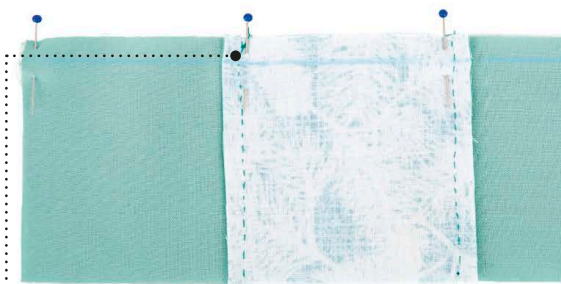


**2** Start sewing at one end, working as for straight seams (see opposite), until you reach the first seam intersection. Sew through the start and end points but do not sew across the seam allowance.

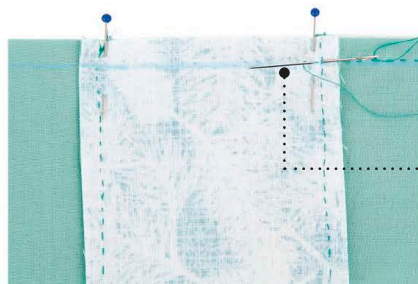

**3** Make your first stitch in the second pair of units a backstitch right next to the seam allowance.



**4** Continue in this way to the end of the row. Secure your stitching with a backstitched loop (see p.40).

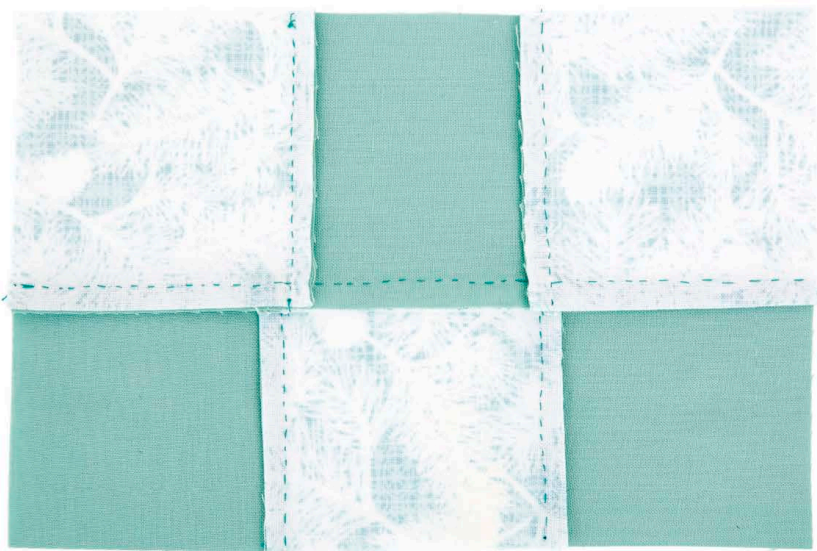

**5** Open the joined rows out and press the seams on each row to opposite sides. Press the just-completed seam to one side.