

▶ SET-IN SEAMS


Most patchwork involves joining straight seams, but in some cases you will need to join three pieces of fabric into one corner. This is called a set-in seam or a Y-seam.

You will need to measure, mark, and stitch carefully, starting and finishing the distance of your seam allowance away from each set-in corner.


SETTING IN BY HAND




1 Diamonds and triangles sometimes meet at oblique angles. Setting a piece into the resulting space needs careful pinning and sewing. Here, a square is set in the space between two diamond shapes. Cut the square to size and mark 6mm (1/4in) seamlines. Mark the starting and finishing points 6mm (1/4in) from the edges.

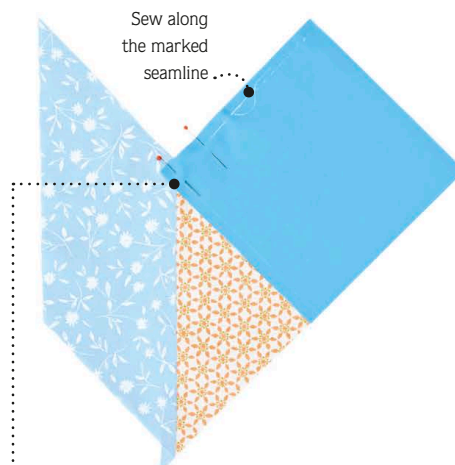

2 Match one corner of the square to the inner point on the first diamond and pin, right sides together. Match the outer point and pin. Pin the edges together along the seamline. Sew along the marked seamline from the outer point to the inner, removing pins as you work. Take a few small backstitches into the seam at the inner corner, avoiding the seam allowance. Make sure not to cut the thread.

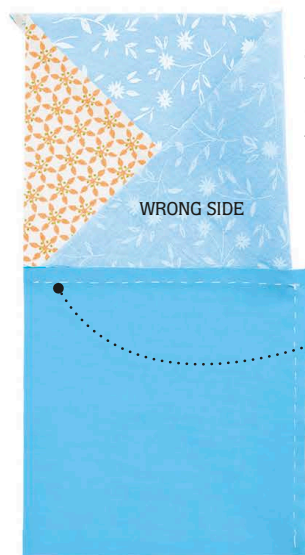

3 Match the adjacent side of the square to the corresponding side of the diamond. Pin and then sew as in Step 2.

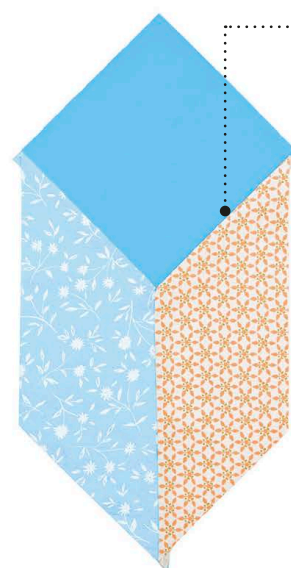

4 Press the seam allowances on the square towards the two diamonds.