




SETTING IN BY MACHINE

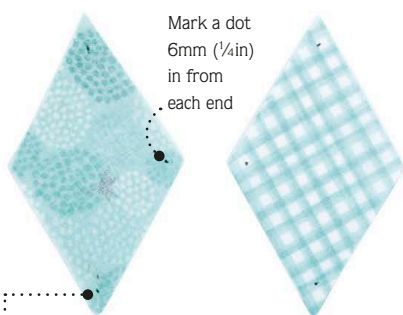

Mark a dot
6mm (1/4in)
in from
each end



Sew from
dot to dot



Dot


Dot

Dot


1 Using a light pencil or water-soluble marker, mark a dot 6mm (1/4in) in from each end of the two pieces that are to be joined first. This marks the point where you start and finish stitching. Do not stitch to the very end of the seam.

2 Place the shapes right sides together and sew from dot to dot, back stitching at each end. Do not overshoot the dots. Press the seam towards the darker fabric.

3 On the wrong side of the piece that is to be set in, mark a dot 6mm (1/4in) in at the three set-in corners of the piece.



WRONG SIDE AFTER
STITCHING

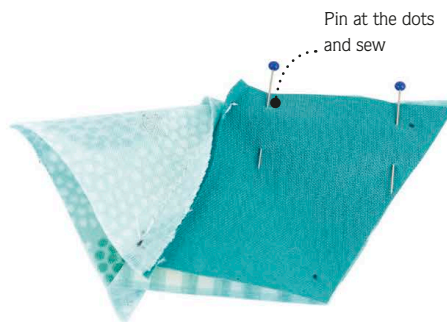

Pin at the dots
and sew


4 Match the middle marked corner of the piece that is to be set in with the corresponding dot on one of the two pieces that have already been stitched together. Pin the seam at each end and sew from the inside corner to the outer dot.

5 Match the outer dot on the second side of the piece that is to be set in with the outer dot on the free edge of the other piece. Pin them together at the dot and sew, again stitching from the inside corner to the outer dot.

6 Press the seams flat in one direction. Snip off the corners.



WRONG SIDE

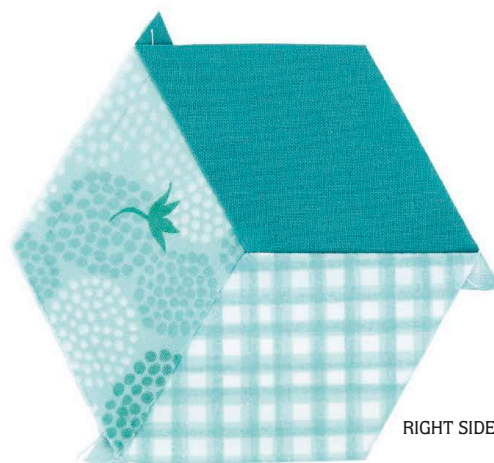

RIGHT SIDE