



SASHING

Sashing is strips of fabric placed between blocks to frame them. Sampler quilts and star blocks usually have sashing to give each block the chance to shine. The width of the sashing is flexible: try


out different widths before you cut the strips. Plain or pieced squares (known as setting squares or cornerstones) can be placed at the corners of a block to make the pattern even more interesting.




Straight-set simple continuous sashing Each block in this piece is framed by straight-set simple sashing.



Straight-set sashing with setting squares Adding a square in each corner between the blocks creates more pattern. The setting squares can also be pieced; simple pinwheel, four-patch, and nine-patch designs work well.



Vertical or horizontal set sashing Blocks can be assembled in rows with the sashing between them running vertically or horizontally.



Diagonal set (on point) with sashing Blocks set on point can be framed by sashing and assembled in strips with extra triangles added around the edges to give a chevron effect.


SIMPLE CONTINUOUS SASHING



1 Cut sashing strips to the desired width plus a 1.2cm ($\frac{1}{2}$ in) seam allowance, and to the same length as one side of the blocks.



2 With right sides together and leaving a 6mm ($\frac{1}{4}$ in) seam allowance, alternate strips and blocks to make a row. Press the seams towards the strips. Repeat to make as many rows as needed.

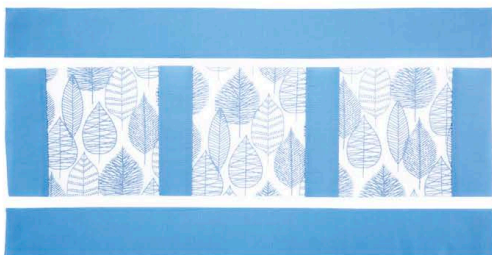

3 Cut two more sashing strips to the desired width plus a 1.2cm ($\frac{1}{2}$ in) seam allowance, and the same length as the joined row.



4 With right sides together and leaving a 6mm ($\frac{1}{4}$ in) seam allowance, sew the two strips either side of the row. Press the seams towards the sashing. Continue alternating sashing strips and rows of blocks with strips until the quilt top is the required size.