



SASHING WITH SETTING SQUARES

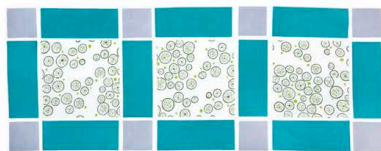

1 Repeat Steps 1 and 2 of Simple continuous sashing (opposite) to make a row of blocks. For the sashing, cut strips the same length as the width of a block, and setting squares the same width as the strips.

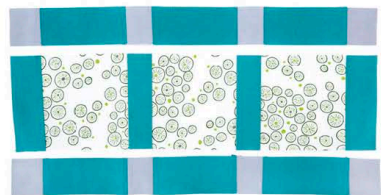

2 With right sides together and leaving a 6mm ($\frac{1}{4}$ in) seam allowance, alternate squares and strips to make two long sashing strips.




3 With right sides together and leaving a 6mm ($\frac{1}{4}$ in) seam allowance, machine stitch the long sashing strips along the top and bottom edges of the row of blocks. Ensure that the corners of the blocks and the setting squares match up. Continue alternating rows of sashing strips and blocks until the quilt is the required size.

TILTED BLOCK SETTING




1 First make the central block, then frame it with a wide border made from four pieces of sashing, as shown left.

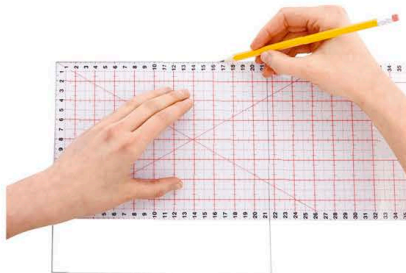


2 Create a template for the block by measuring and marking its size on tracing paper, adding 1.2cm ($\frac{1}{2}$ in) seam allowances.



3 Centre the template on top of the block that was made in Step 1, then angle the template to the desired tilt.

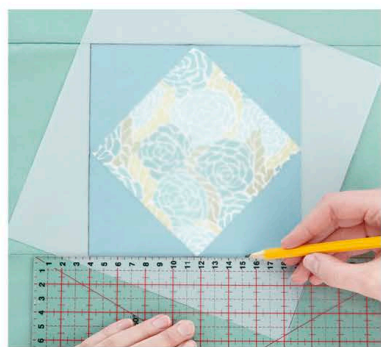

4 In order to be able to tilt subsequent blocks at the same angle, use a ruler and pencil to mark the outline of the central block on the template.

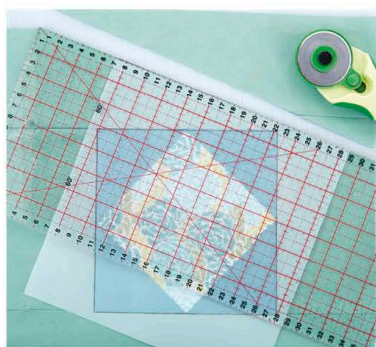

5 Cut away the fabric around the template. To reuse the template, ensure that all central blocks in the project align with the block marked on the template.



6 When the finished block is placed so its outside edges are perpendicular, the central block will be tilted.