



MAKING A MITRED BORDER

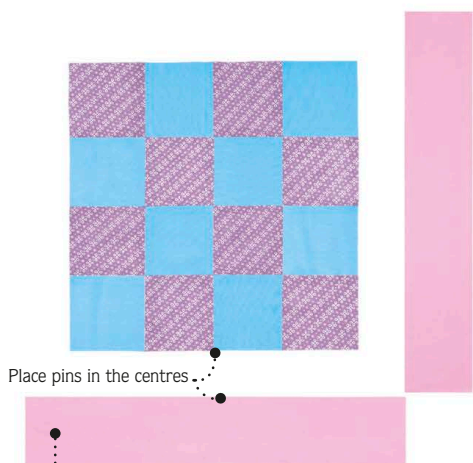


1 Square up the quilt top. Cut the border strips to the desired width plus 1.2cm ($\frac{1}{2}$ in) for seam allowances. Measure the length of the quilt top sides, then add two times the width of the border, plus 15.5cm (6in) to calculate the length.

2 Place a pin in the centre of each side of the quilt top and each border. Aligning the centre pins, position the borders right side together with the corresponding side and pin in place. Position a pin 6mm ($\frac{1}{4}$ in) from each corner to mark your starting and stopping points for stitching.

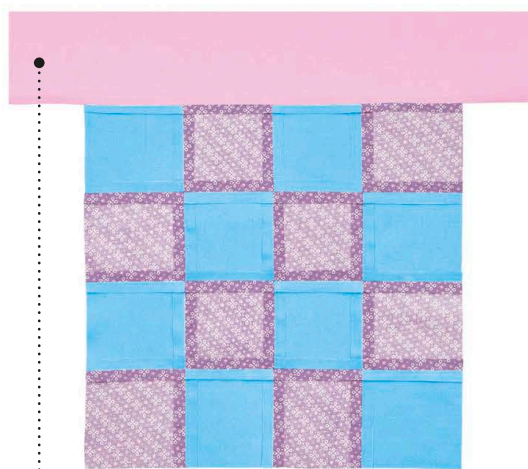

3 Join the border strips to all sides of the quilt, leaving a 6mm ($\frac{1}{4}$ in) seam allowance. Do not stitch into adjoining border strips. Press the seams towards the borders.



4 Place the quilt right side up on a flat surface and fold under the ends of each strip at a 45-degree angle. Pin the folds in place from the right side, ensuring that the angle is correct. Press the folds and remove the pins.



5 Working from the wrong side, re-pin the mitre along the pressed fold. Tack in place if desired. Hand stitch the fold together from the quilt edge to the outside corner. Trim the seam allowance and press it open. Repeat to mitre all corners.

MULTIPLE MITRED BORDERS



If you are using multiple borders, join them together in straight rows and attach them to the quilt top in one go. Mitre the corners as in Steps 4 and 5, making sure you match the borders through the mitre.