



FOUNDATION PIECING: REVERSE PIECED

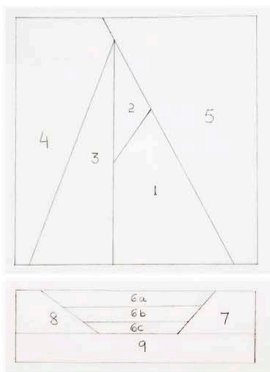


1 Cut the chosen foundation (use paper, calico, wadding, or non-woven interfacing) to size, with a generous amount added all around.


2 Trace or transfer the design to the foundation. Number the piecing order clearly on the foundation. You will be sewing from the back of the foundation, so the block will be the reverse of the foundation itself.



3 Cut out piece 1 and pin it right side up on the reverse side of the foundation. Make sure that it extends beyond the stitching lines; you can check this by holding it up to the light.

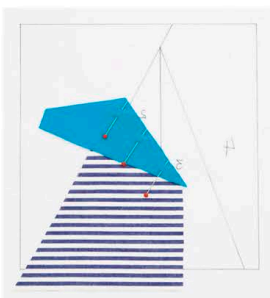


4 Cut out piece 2 and place it right sides together on piece 1, along the seam to be sewn. Pin through all layers.

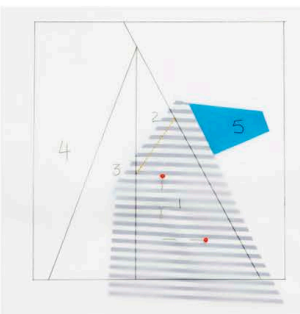


5 Turn the foundation right side up and re-pin carefully to avoid catching any pins in the feed dogs of your sewing machine.


6 Stitch the seam, joining pieces 1 and 2. If your foundation is made of paper, use a short 1.5 stitch length to make it easier to remove. If necessary, trim the seam allowance to 6mm (1/4in).

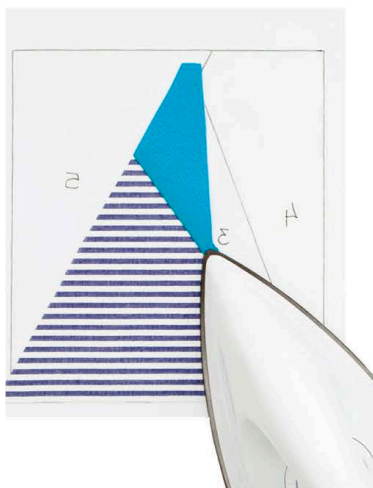

7 Turn the foundation fabric right side up, remove the pins, open the pieces, and press.

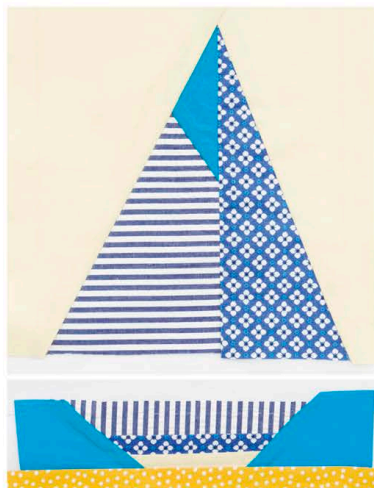

8 Cut piece 3 and align it next to piece 2. Pin it on top, then turn over and stitch as in Steps 3–7 until the top is complete. Make the bottom section in the same way.

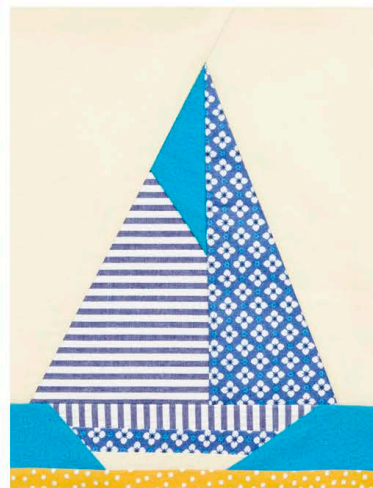

9 Join the sections. Then trim the foundation level with the edges of the patchwork design. If the foundation is removable, carefully tear it away.