

▷ Chieftain Armored Vehicle Launched Bridge (AVLB)

Date 1974 **Country** UK

Weight 58.7 tons (53.3 tonnes)

Engine Leyland L60 multifuel, 750 hp

Main armament None

The Chieftain AVLB (shown here without a bridge) enabled armored forces to cross rivers or obstacles. Powered by hydraulics, the vehicle could launch or recover its bridge in just three minutes. The largest bridge launched by Chieftain, the Number 8, could span a 75 ft (23 m) gap.



Folding bridge

Chieftain chassis



Headlight

◁ Chieftain ARRV


Date 1974 **Country** UK

Weight 59 tons (53.5 tonnes)

Engine Leyland L60 multifuel, 750 hp

Main armament None

The Chieftain Armoured Recovery and Repair Vehicle (ARRV) was based on the Chieftain Mk 5 hull and suspension, with the addition of an Atlas crane for lifting damaged vehicles, two winches, and a dozer blade. It saw service in the first Gulf War in 1991.

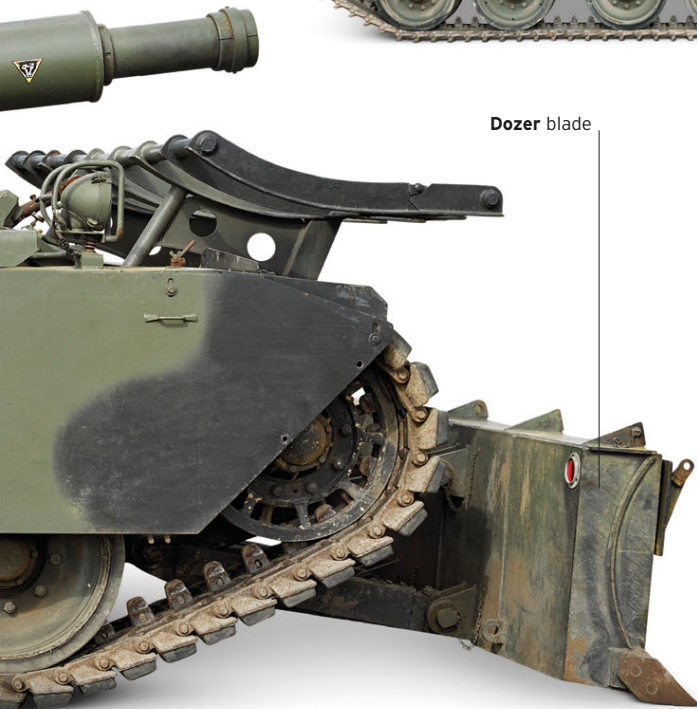

Dozer blade



Radar dish

△ FV432 Cymbeline Mortar Locating Radar

Date 1975 **Country** UK

Weight 16.8 tons (15.2 tonnes)

Engine Rolls-Royce K60 No4 Mk 4F multifuel, 240 hp

Main armament None

The Cymbeline Radar was used to track mortar shells back to their launch point, allowing rapid counterattacks. The Mark 2 version was mounted on an FV432 APC. The large, open space inside these vehicles makes them suitable for a wide range of roles, while their mobility and protection enables them to operate farther forward than wheeled trucks.



Towing cable

▷ Challenger Armored Repair and Recovery Vehicle (CRARRV)

Date 1991 **Country** UK

Weight 67.4 tons (61.2 tonnes)

Engine Perkins CV12 V-12 diesel, 1,200 hp

Main armament None

The CRARRV was based on the Challenger 1, although it has been upgraded to be compatible with the Challenger 2. It has a 55.1 ton (50 tonne) winch, 7.2 ton (6.5 tonne) crane, a three-man crew, and space for the crew of the recovered tank. This version is fitted with reactive armor, ECM, and underbelly protection.

Drive sprocket



Reactive armor