


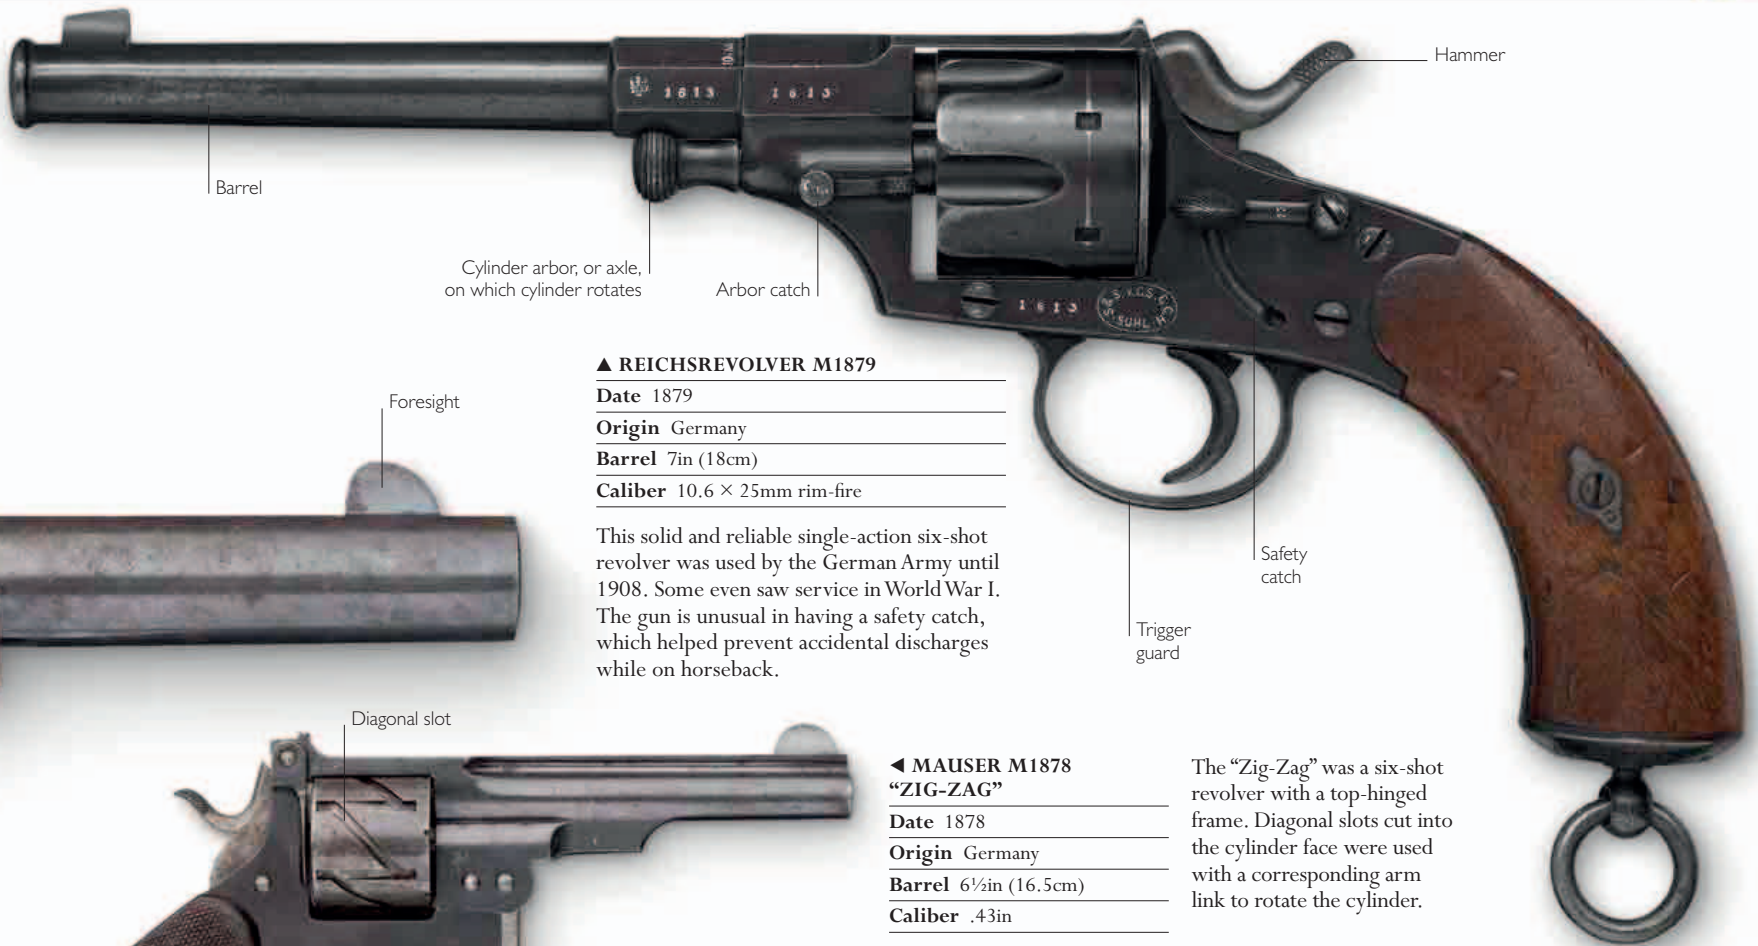

## ▲ REICHSREVOLVER M1879

Date 1879

Origin Germany

Barrel 7in (18cm)

Caliber 10.6 × 25mm rim-fire

This solid and reliable single-action six-shot revolver was used by the German Army until 1908. Some even saw service in World War I. The gun is unusual in having a safety catch, which helped prevent accidental discharges while on horseback.



## ◀ MAUSER M1878 "ZIG-ZAG"


Date 1878

Origin Germany

Barrel 6½in (16.5cm)

Caliber .43in

The "Zig-Zag" was a six-shot revolver with a top-hinged frame. Diagonal slots cut into the cylinder face were used with a corresponding arm link to rotate the cylinder.

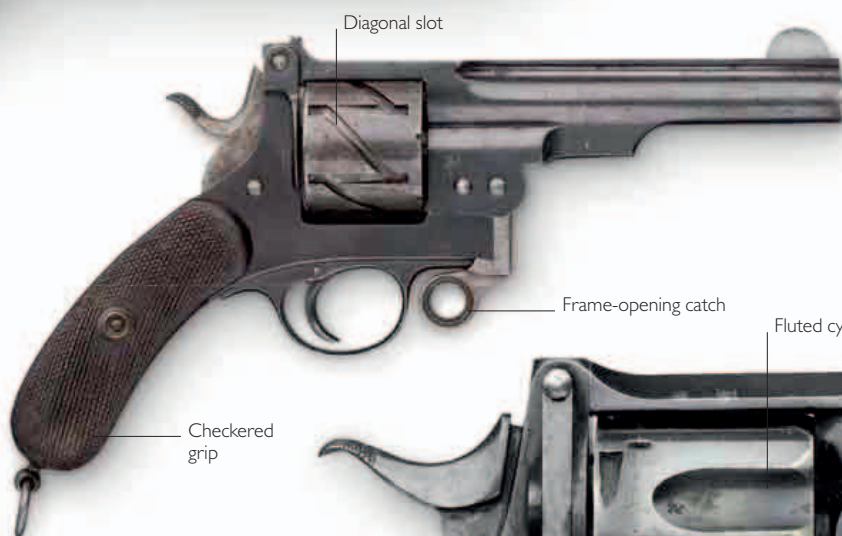

Checked grip

Frame-opening catch

Fluted cylinder

Cylinder axis pin

Rib reinforces barrel

Checked wooden grip

Frame pivot

## ▼ COLT FRONTIER DOUBLE ACTION


Date 1878

Origin US

Barrel 5½in (14cm)

Caliber .44in/.45in

After introducing the double-action Lightning (left) in 1877, Colt came up with a double-action version of the SAA "Peacemaker" (also left) in .44in and .45in calibers.

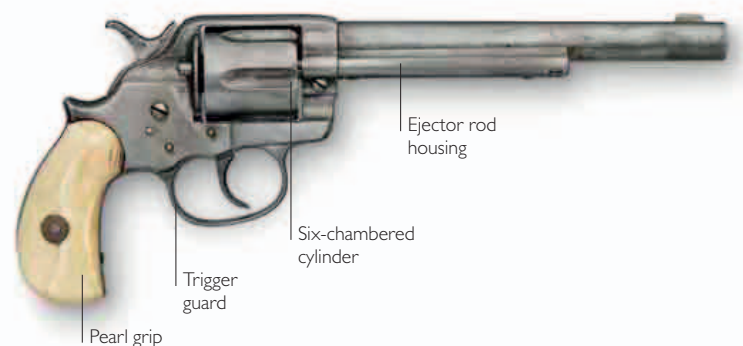

## ▲ WEBLEY-PRYSE NO. 4 REVOLVER


Date 1877

Origin UK

Barrel 6¼in (16cm)

Caliber .45in

In 1876, Charles Pryse designed a tip-down, break-open revolver with a rebounding-hammer action. It also featured simultaneous extraction of spent cartridges. Although uncommon in revolver design, automatic ejection of cartridges was desirable in military revolvers, which often needed to be reloaded quickly. This Fourth Model Webley-Pryse, recognizable by its fluted cylinder, was made in calibers ranging from .32in to .57in.

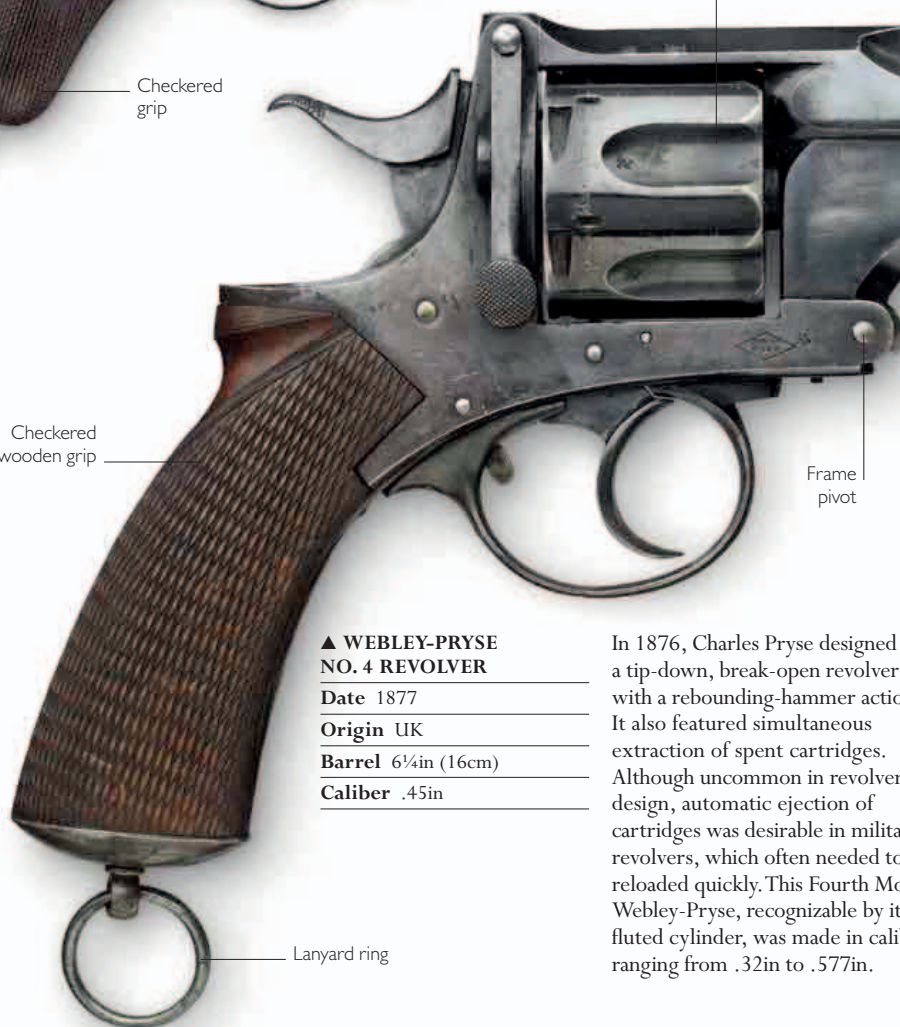

Lanyard ring