


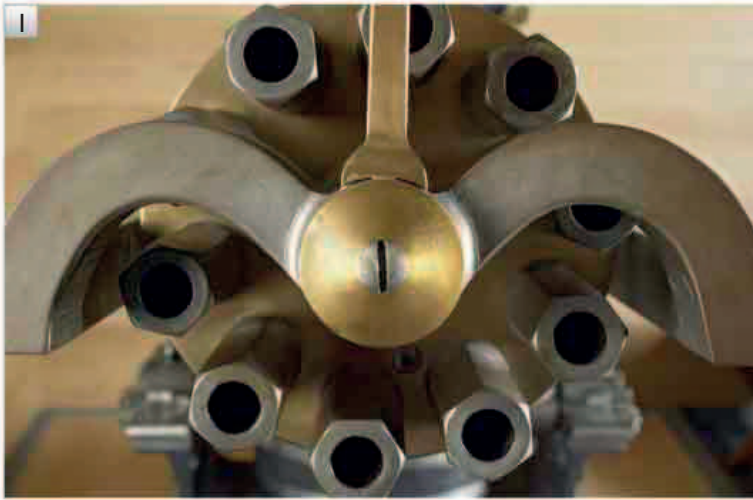

◀ FORESIGHT AND BARRELS

The foresight enabled the gun to be kept on target. Ten barrels meant that each barrel fired only once in 10 rounds. Although each barrel would heat up considerably, the gun was able to achieve a higher rate of fire without serious overheating than was possible with a single-barreled gun.


► MAGAZINE SLOT

The 40-round magazine was constructed with a groove to help prevent the gun from jamming.



► ANTI-ROTATION PAWL

The anti-rotation pawl is the curved lever at the rear of the opening containing the channels for the breech bolts—one for each of the 10 barrels. The anti-rotation pawl was fitted to prevent the group of barrels being rotated in the wrong direction.

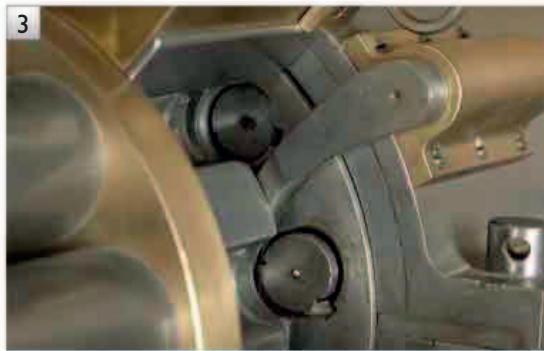

► WHEEL HUB

To make transportation easier, a towing ring was secured to the wheel hub by a cotter (a wedge-shaped fastener).



4
Elevating gear

6
Traversing handspike
stowage (on the right
side of the trail)

▲ ELEVATING GEAR

This wheel was used to raise and lower the barrels of the gun.

Riveted iron trail was placed on ground for stability during combat, and at other times could be attached to a horse-drawn limber containing ammunition



◀ TRAVERSING HANDSPIKE

Stored on the right side of the carriage trail, the handspike was used for additional grip when maneuvering the gun carriage. It is not visible on the main picture of the gun.