


▼ TOGGLE ASSEMBLY

The toggle assembly consists of the sliding breechblock and the hinged toggle. The toggle is a mechanical linkage between the breechblock and the mainspring, which runs down the back of the gun's butt. The mainspring is attached to the toggle by the coupling link.

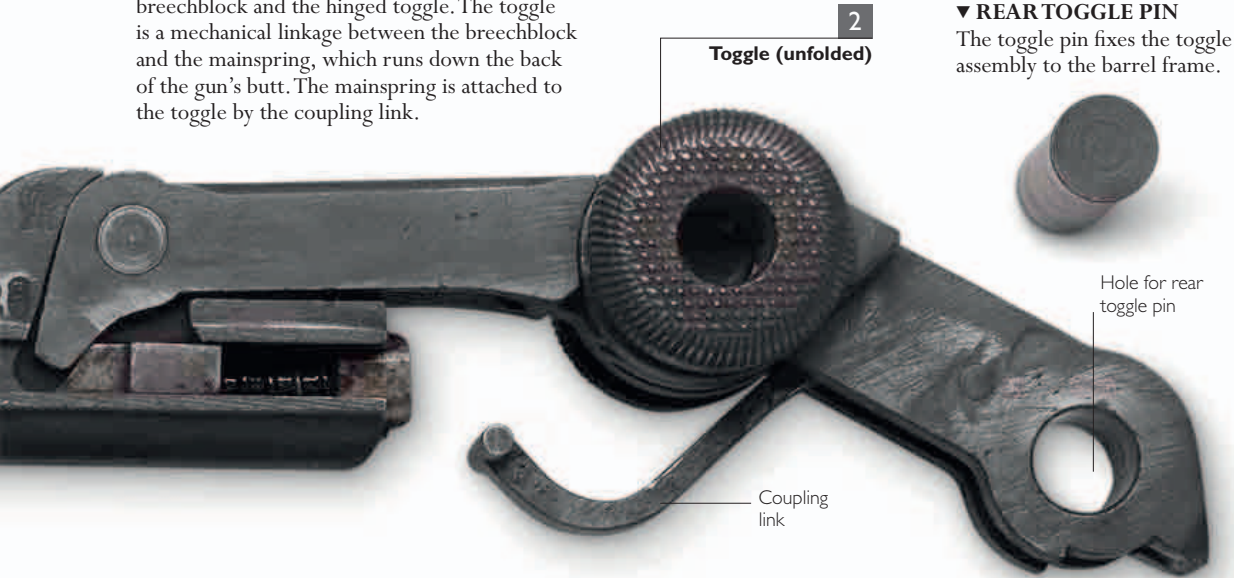

Toggle (unfolded)

▼ REAR TOGGLE PIN


The toggle pin fixes the toggle assembly to the barrel frame.

Hole for rear toggle pin

Coupling link



FULL VIEW

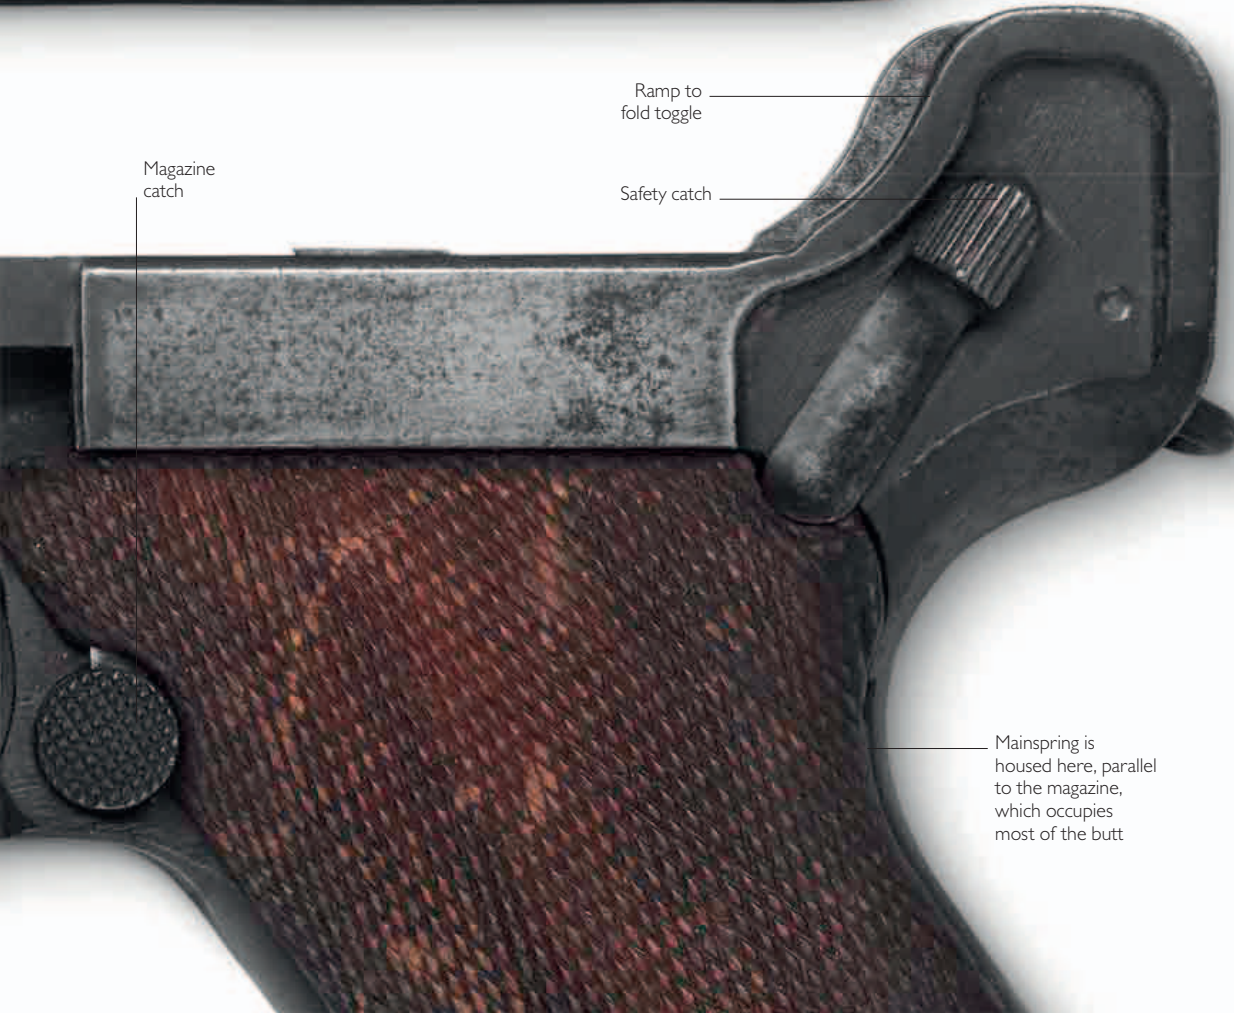

Magazine catch

Ramp to fold toggle

Safety catch

Mainspring is housed here, parallel to the magazine, which occupies most of the butt



▲ TOGGLE (FOLDED)

The user loads the gun by pulling the toggle, which folds upward, drawing the breechblock backward and compressing the mainspring (left, in the butt). As the toggle folds upward, the spring inside the magazine pushes a cartridge up. Then, as the mainspring extends, it straightens the toggle and pushes the breechblock and cartridge forward, sealing the breech and chambering the cartridge. On firing, the recoil sends the breechblock and toggle backwards, and the toggle folds as it runs up a ramp on the rear of the frame, triggering a cycle of automatic loading.