

COLT MODEL 1911

Date 1914

Origin US

Barrel 12in (30.5cm)

Caliber .45in ACP

With seven cartridges in the magazine and one in the chamber, this rugged gun was a formidable weapon to be confronted with. The Model 1911's use of the same ammunition as the Thompson submachine-gun made these two weapons ideal and deadly partners, not only for use in the battlefield by the military but also by law enforcement agencies, and "gangs" in their battles on the streets. The model shown here was made in 1914.



FULL VIEW

Grip-retaining screw



**FULL VIEW
(SLIDE PULLED BACK)**

Breechblock containing firing pin and extractor

2

Rear sight


▼ BARREL ASSEMBLY

The barrel is fitted into the barrel bushing, and the recoil spring sits underneath the barrel. To field strip the gun, the recoil spring is pushed backward, allowing the barrel bushing to be rotated sideways. The slide stop can then be removed and slide and barrel taken apart from the main frame.

▼ MAGAZINE


A steel box magazine holds seven cartridges and is fitted inside the butt. When the last cartridge is fired, the platform inside the magazine engages with the slide stop, which holds the slide in an open position to show the magazine is empty. Inserting a full magazine and depressing the slide stop allows the slide to move forward and feed a cartridge into the chamber ready for firing.

Magazine platform (opened up)

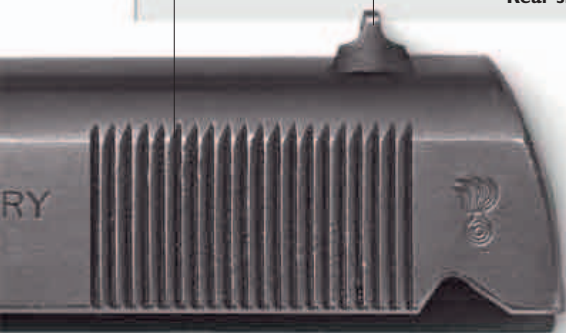

Slide stop is a "hold-open" device that retains the slide in a rearward position after the last round from the magazine has been fired

Barrel link pin, which attaches barrel assembly to frame, fits here

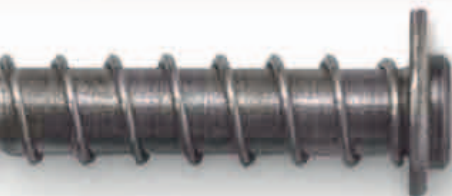

Trigger

Magazine-release button

Magazine housed in butt

Hammer (cocked)

Safety catch

Grip safety locks the trigger so that it cannot be pulled unless the user is gripping the pistol and has the safety pressed down

