


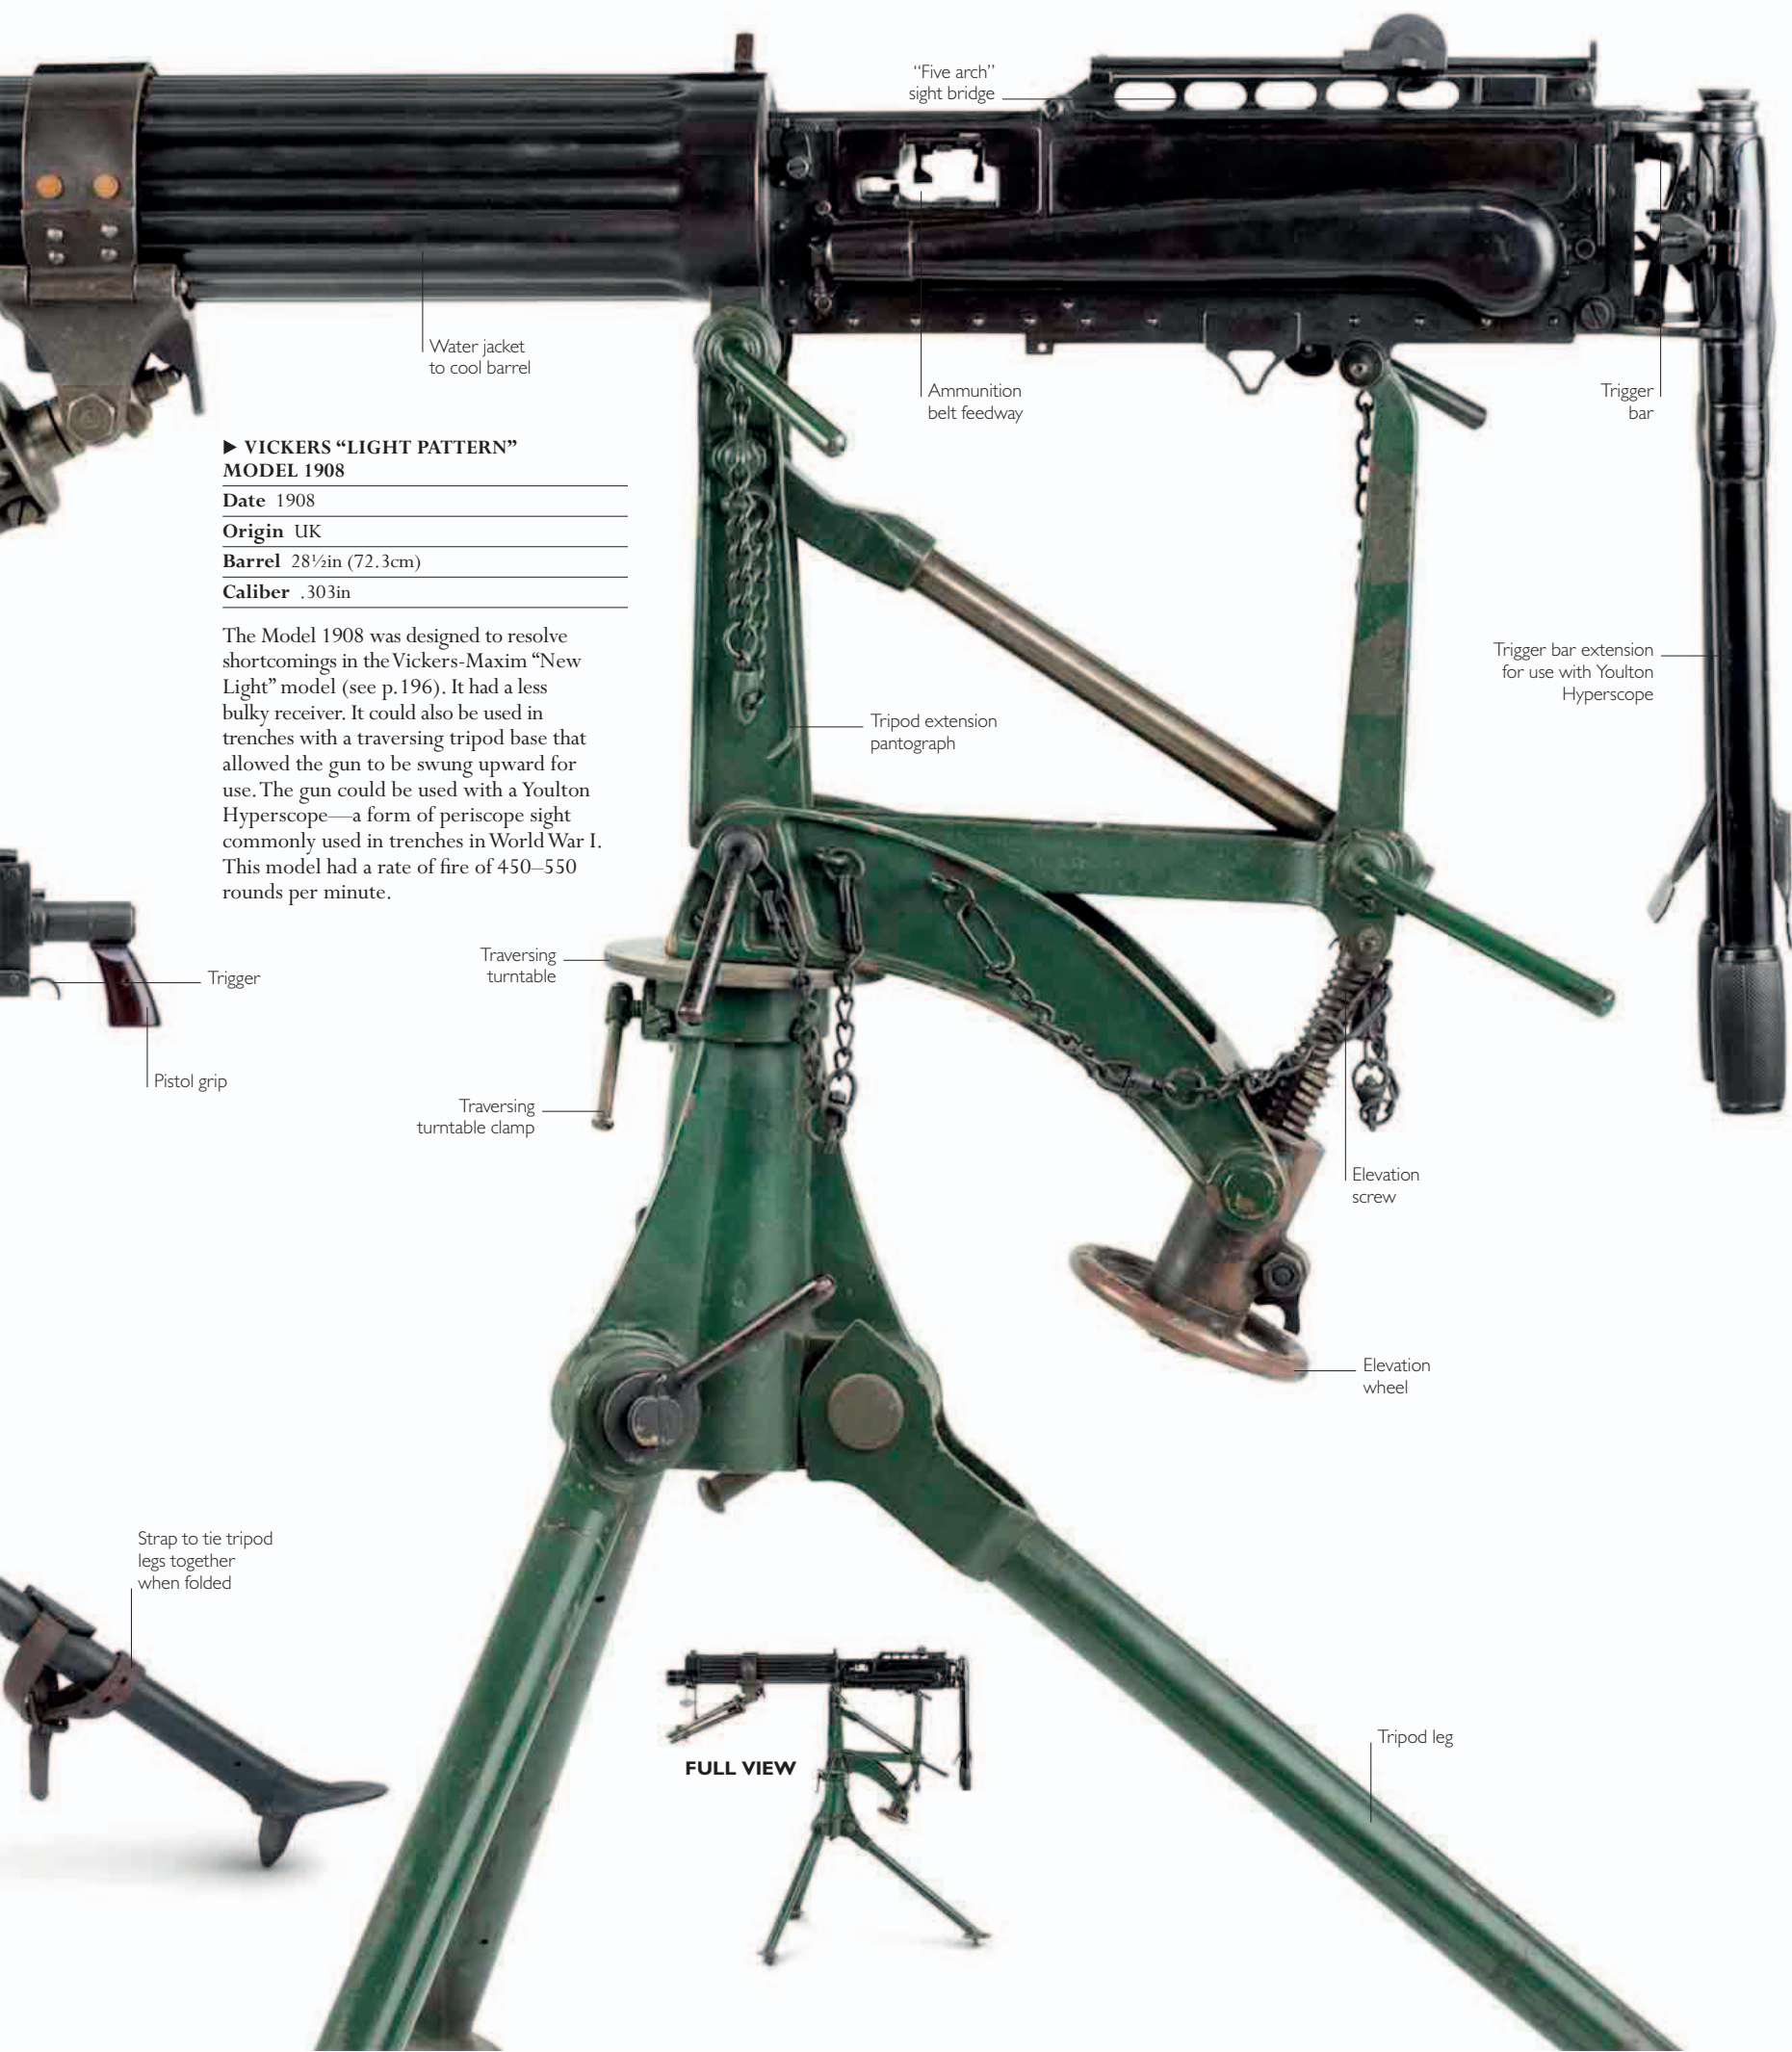

► VICKERS “LIGHT PATTERN”
MODEL 1908

Date 1908

Origin UK

Barrel 28½in (72.3cm)

Caliber .303in

The Model 1908 was designed to resolve shortcomings in the Vickers-Maxim “New Light” model (see p.196). It had a less bulky receiver. It could also be used in trenches with a traversing tripod base that allowed the gun to be swung upward for use. The gun could be used with a Youlton Hyperscope—a form of periscope sight commonly used in trenches in World War I. This model had a rate of fire of 450–550 rounds per minute.

“Five arch”
sight bridge

Water jacket
to cool barrel

Ammunition
belt feedway

Trigger
bar

Trigger bar extension
for use with Youlton
Hyperscope

Tripod extension
pantograph

Trigger

Pistol grip

Traversing
turntable

Traversing
turntable clamp

Elevation
screw

Elevation
wheel

Strap to tie tripod
legs together
when folded

FULL VIEW

Tripod leg